

draft-psenak-ospf-bier-extensions-02.txt

P. Psenak, N. Kumar, IJ. Wijnands – Cisco Systems

J. Zhang – Juniper Networks

A. Dolganow - Alcatel-Lucent

T. Przygienda- Ericsson

S. Aldrin

BFR Prefix


- Unique (within a given BIER domain), routable IP address that is assign to each BIER router
- All the BIER specific information that a BIER router needs to advertise to other BIER routers are associated with the BFR-Prefix
- OSPF Extended Prefix Opaque LSA is used to flood BIER related information

Changes in -02

- Introduce BIER sub-domain
- Move Bit String length into MPLS TLV.


BIER Sub-TLV

- Sub-TLV of the Extended Prefix TLV
 - ietf-ospf-prefix-link-attr
- Multiple BIER Sub-TLVs may be included

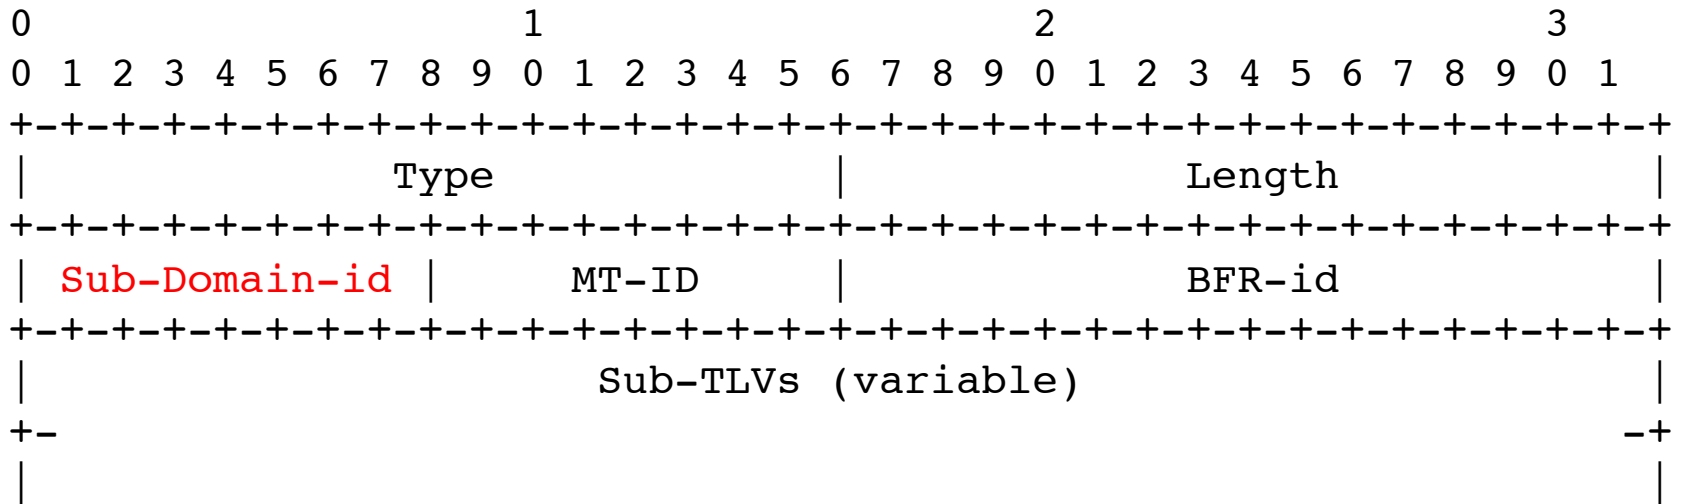

BIER MPLS Encapsulation Sub-TLV

- sub-TLV of the BIER Sub-TLV
- advertises MPLS specific information used for BIER

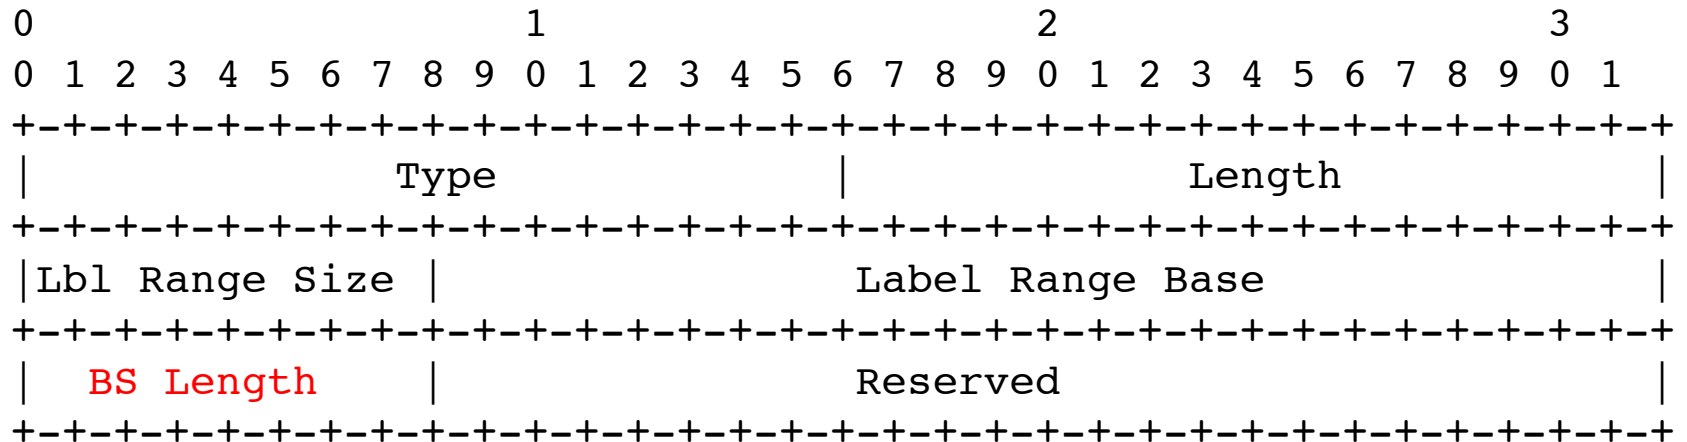

Status

- 2nd version of the draft
- Work in progress
- Please provide comments on the list



Questions?