

Applying BGP flowspec rules on a specific interface set

draft-ietf-idr-flowspec-interfaceset-04

S. Litkowski, Orange

A. Simpson, Nokia

K. Patel, Arrcus, Inc


J. Haas, Juniper Networks

L. Yong Huawei

Status of -04

- Geoff Huston had supplied substantial feedback on -03.
(Thanks, Geoff!)
- The authors decided to simplify the use cases in the document.
- -04 does not functionally differ from -03.
 - It does note the code points registered via IANA since -03.

Open Issues

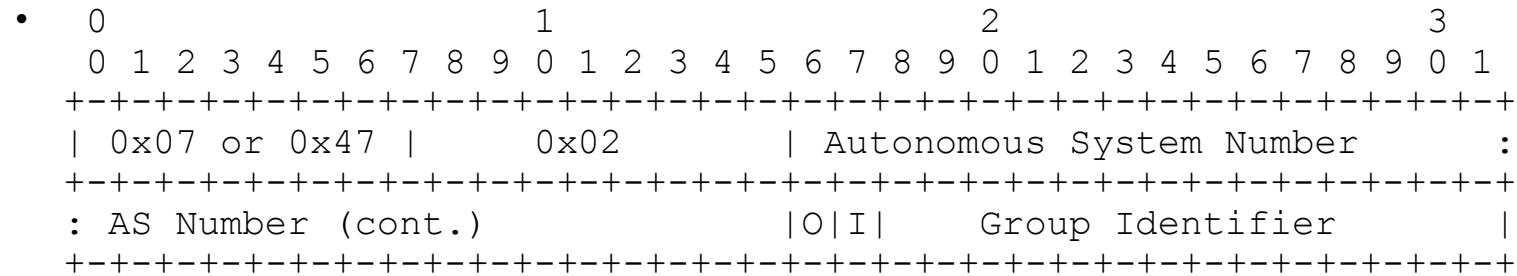

- The draft text calls out O=0, I=0 as reason to discard the NLRI.
 - Should move text to “cannot become active, treat as withdraw”.
- The text is silent on the treatment of the AS number.
 - Nokia’s implementation currently ignores the AS number. I.e. its interfaces are treated as being in a wildcard AS group.
 - Should the draft discuss expected use of this field or leave it to the implementation?

Next Steps

- We'd like to drive the open issues to closure, then resume the Last Call process.

Questions?