

Using Only Link-Local Address in Network Core

draft-behringer-lla-only-00


83rd IETF, 26-30 Mar 2012
V6OPS WG

Michael Behringer
Eric Vyncke

Summary

- We propose to use only IPv6 link-local addresses on infrastructure links wherever possible.
- We discuss advantages and disadvantages
- Goal: Help in decision process.
- Desired outcome: BCP

Approach

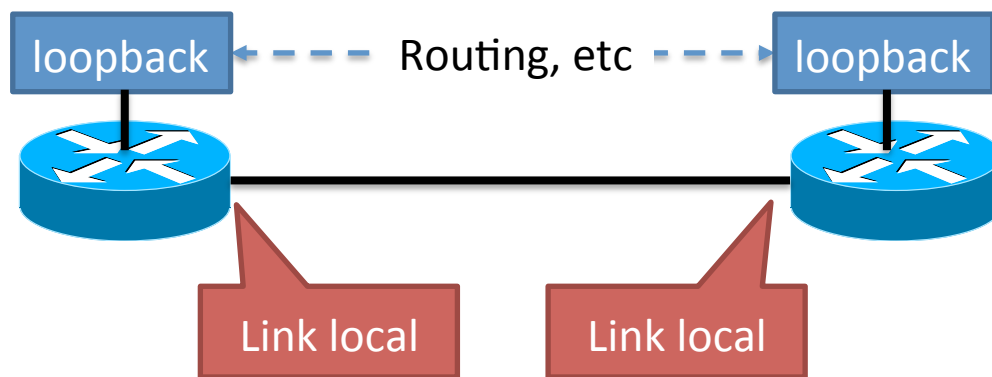

- No global nor ULA addresses on infrastructure links
- Just link local
- Proven to work

Advantages of using link locals on infrastructure links

- Smaller routing table
 - Reduced memory consumption
 - Possibly decreased convergence time
- Reduced attack surface
 - Only need to protect loopbacks from outside
- Lower configuration complexity
 - Less errors
- Less address space required
- Simpler DNS

Caveats and Workarounds

ICMP:

- Cannot ping specific link from remote
- Workaround: RFC 5837 (i/f identifier in response)

• Traceroute:

- Cannot see specific link
- Workaround: RFC 5837 (

• Hardware dependency:

- LL by default
- Workaround: Configure LL statically (ex: fe80::1)

Summary

let operators make a good choice whether to use LL or not.

- We request this to become a

WG document.