

Exposing Source IP Address Type Requirements with DHCPv6

draft-moses-dmm-dhcp-ondemand-mobility-02

D. Moses, A. Yegin

Agenda

Introduction

Quick reminder about DHCPv6 options

Proposed new options

Discussion

Purpose

Enhance DHCPv6 to enable:

- Mobile hosts to state the type of the required source IP address (Nomadic, Sustained or Fixed), when requesting a new source IP address
- Mobile (requesting) routers to state the type of the required IPv6 prefixes (in terms of continuity support), when requesting a new IP prefix
- Networks to convey to the mobile hosts, the type of IP address that was assigned to them
- Delegating routers to convey to the requesting routers, the type of IP prefix that was assigned to them

When?

The DHCP client may be triggered to request an IP address when:

- The mobile host initially connects to a network
- After handoff to a different LAN (a LAN with a different IP prefix)
- When an application requests a specific type of source IP address (as specified in [draft-ietf-dmm-ondemand-mobility-02](#))
- When a mobile router requires a new IP prefix

Agenda

Introduction

Quick reminder about DHCPv6 options

Proposed new options

Discussion

How are IP addresses Communicated?

The most intuitive DHCP message containing address information is the **DHCP Reply** message issued by a DHCP server to communicate the allocated IP address to a requesting host.

IP addresses, however, are also communicated in additional DHCP messages like:

- **Request** – when a client requests IP address(s), to ‘hint’ its desired address
- **Renew** – when a client wishes to extend the lifetime of addresses

The IP address is passed in an **IA Address Option** which is associated with an **Identity Association (IA)**. It is encapsulated in either an –

- **IA_NA option** – for regular IP addresses (non-temporary)
- **IA_TA option** – for temporary IP addresses (RFC 3041)

Likewise, an IP Prefix is passed in an **IP Prefix Option** which is encapsulated in an –


- **IA_PD option** – for IP prefix delegation

The IA Address Option (cont)


The **IA Address Option** includes an **IAaddr-options** field which encapsulates options that are associated with the specific **IA Address**.

the **Status Code Option** is an example of an option that can be encapsulated in the **IAaddr-option** field to convey status information associated with the **IA Address**.

IA_NA/IA_TA Option

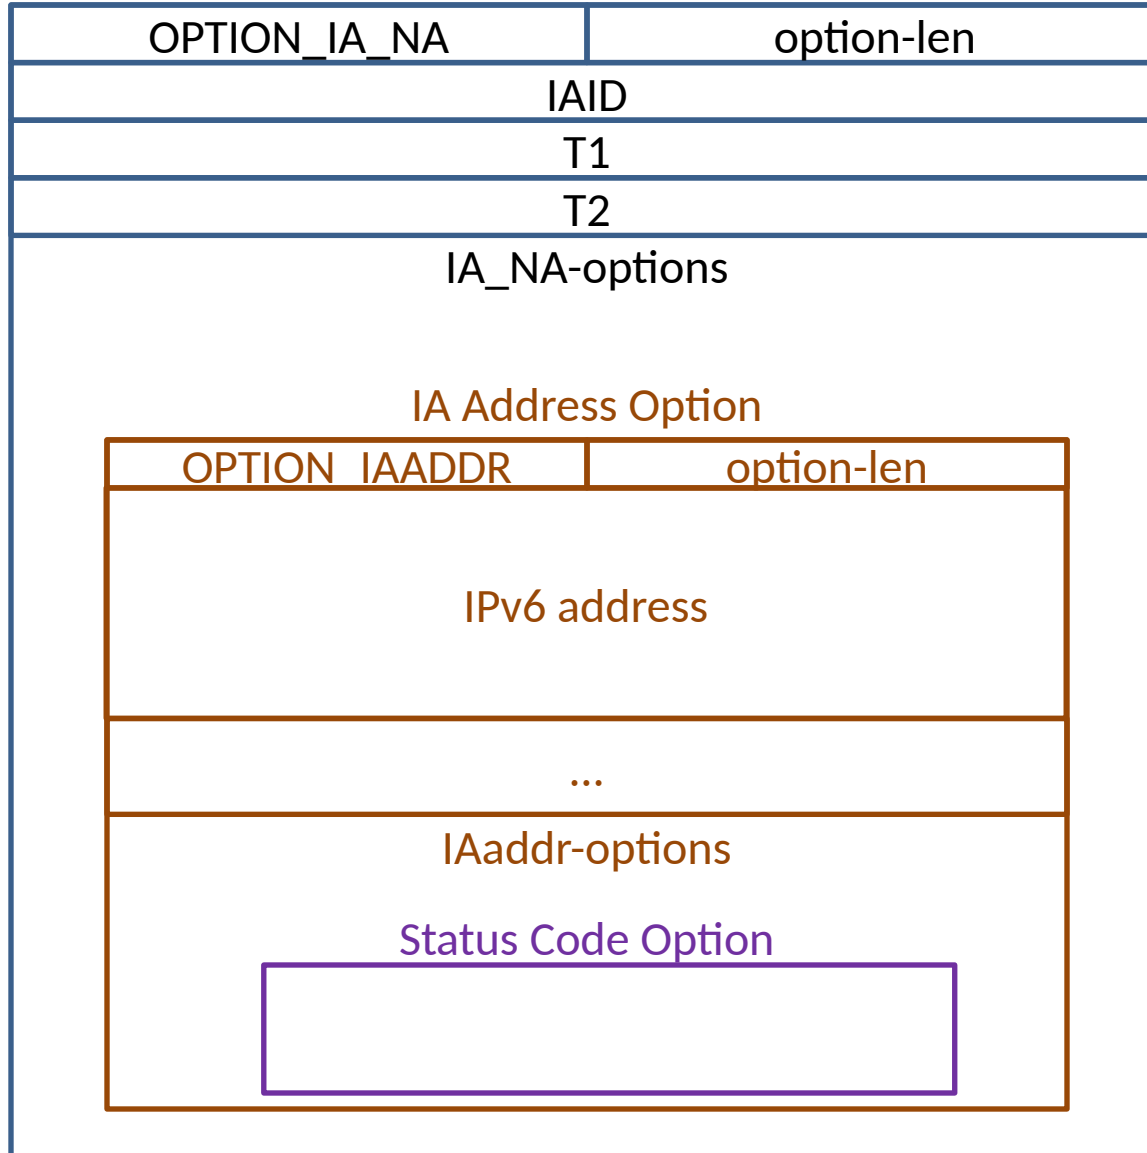

IA_PD Option

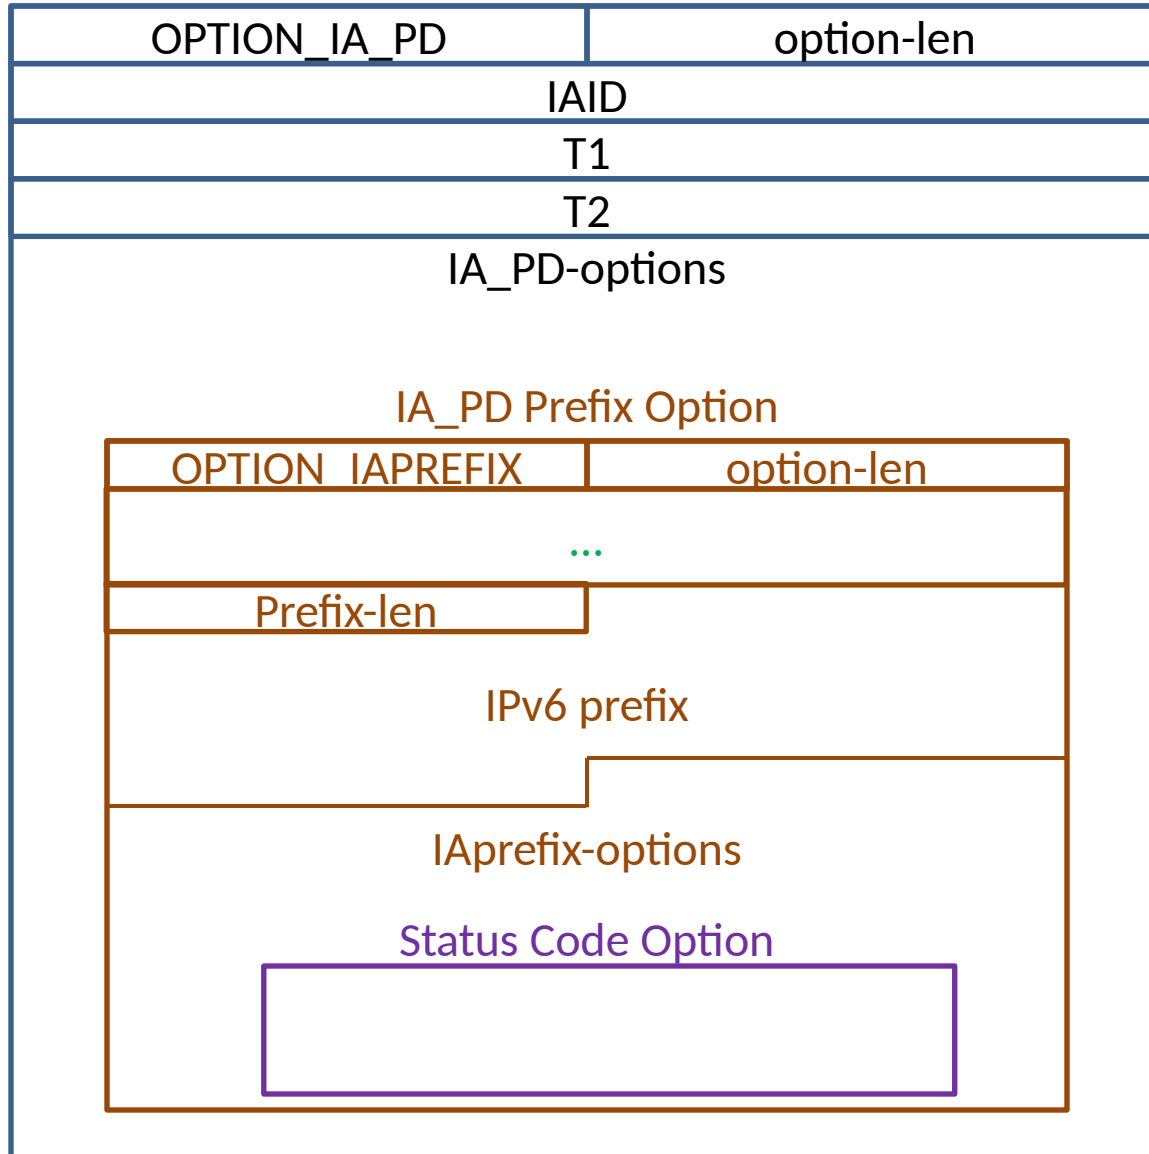

Agenda

Introduction

Quick reminder about DHCPv6 options

Proposed new options

Discussion

New Options

The [draft-moses-dmm-dhcp-ondemand-mobility](#) draft proposes the following new options:

- IPv6 Continuity Service Option
- Anchor Preference Option

The IPv6 Continuity Service Option

The **IPv6 Continuity Service Option** describes the type of continuity service associated with the IA Address.

When used by the DHCP client in a Request, it indicates the type of continuity service the client desires.

When used by the DHCP server in a reply, it indicates the type of continuity service committed by the network with the associated IA address.

The IPv6 Continuity Service Option (Cont)


The **IPv6 Continuity Service Option** is encapsulated in either:

- The **IAaddr-options** field of the **IA Address Option** it is associated with.
- The **IAPrefix-options** field of the **IA_PD Prefix Option** it is associated with

Possible values represent:

- **Nomadic address/prefix** – not valid after a handoff to a LAN with a different IP prefix
- **Sustained address/prefix** – Valid throughout the IP session
- **Fixed address/prefix** – Valid as long as the mobile node is connected
- **AnyType** – no guarantee of the continuity service

IA_NA Option with an encapsulated IP Continuity Service Option

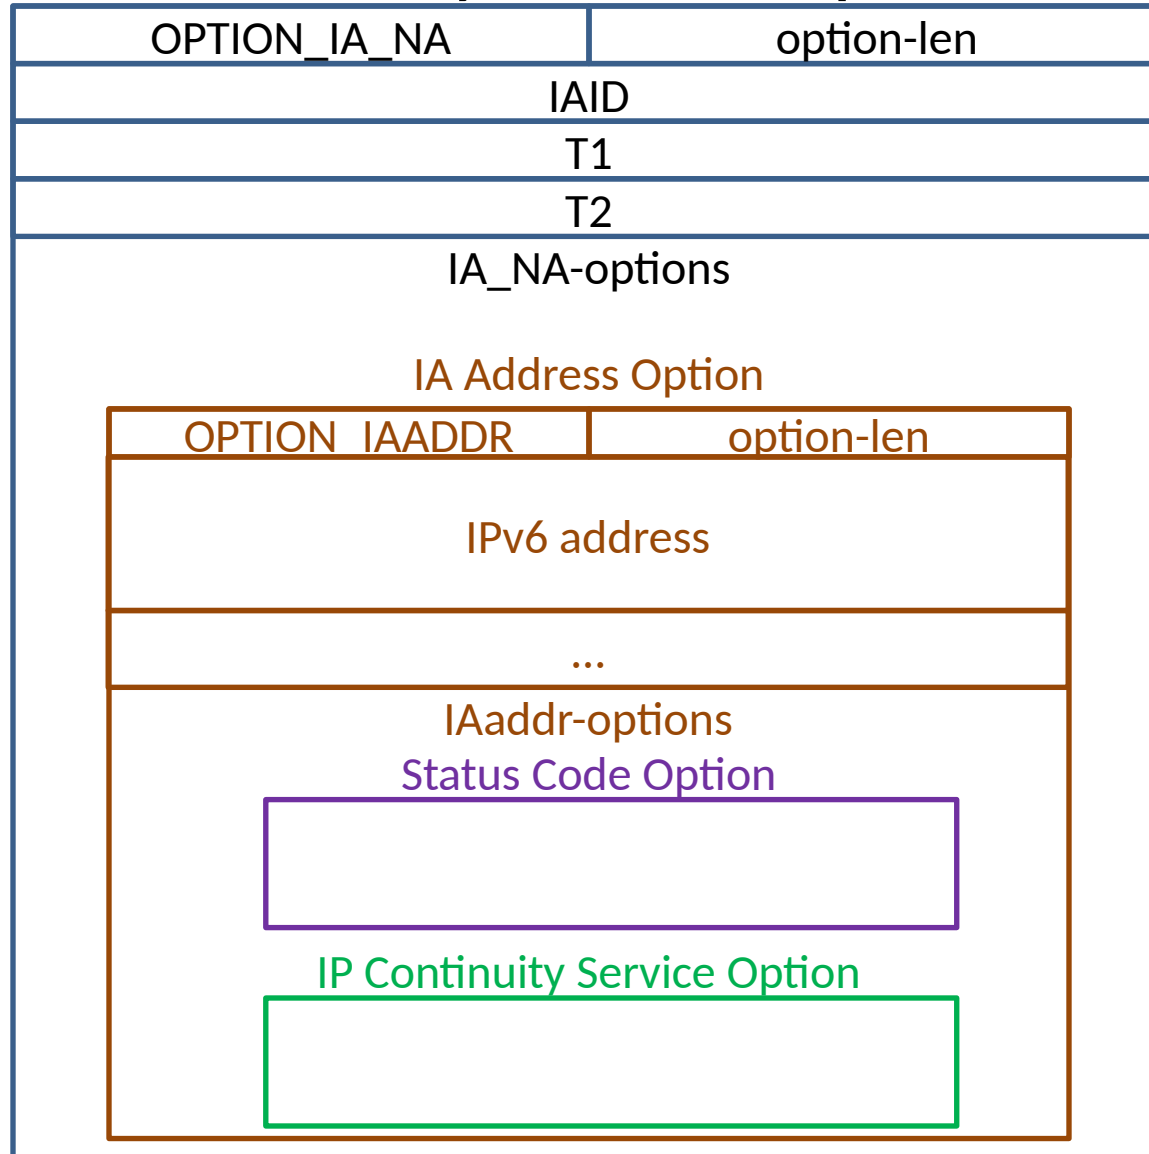

IPv6 Continuity Service Option Usage Rules

- The server MUST never encapsulate an **IPv6 Continuity Service Option** in an **IA Address Option** if the client had not used it first.
- Once the **IPv6 Continuity Service Option** was encapsulated in an **IA Address Option**, in both requests and replies, it MUST be used in all subsequent usages of that specific **IA Address** in any message with the same value that was initially used by the server.
- The same rules apply when the **IPv6 Continuity Service Option** is used with the **IA_PD Prefix Option**

Backwards Compatibility

- If a client uses the **IPv6 Continuity Service Option** in an **IA Address option**, but receives no reply from the server after the specified retry attempts –
 - It SHOULD assume that the server does not support the **IPv6 Continuity Service Option** and retry without it
 - It MAY record this knowledge about the server and avoid using the **IPv6 Continuity Service Option** in subsequent communication with that server.
 - If stopping the usage of the **IPv6 Continuity Service Option** when communicating with a specific server, the client SHOULD try again after a period of time (in case the server was upgraded at some point of time)
- Both DHCPv6 clients and servers MUST support the legacy **IA Address Option** (with no encapsulated **IPv6 Continuity Service Option**)
- The same rules apply to the usage of the **IPv6 Continuity Service Option** within an **IA_PD Prefix Option**

The Anchor Preference Option

- Draft [draft-aliahmad-dmm-anchor-selection-01](#) describes different scenarios for anchor selection.
- The Anchor Preference Option enables the mobile host to indicate to the network its Anchor preference, by specifying the IP prefix of the desired source address.
- The network may take this indication in account when selecting the Mobile Anchor for this mobile host

The Anchor Preference Option (Cont)

The **Anchor Preference Option** must be encapsulated in either:

- The **IA_NA-options (or IA_TA-options)** field of the **IA_NA Option (or IA_TA Option)** it is associated with.
- The **IA_PD-options** field of the **IA_PD Option** it is associated with


This option can only appear in the initial request from the client.

It will include the following fields:

- prefix length
- IP prefix (16 octets)
- Preferred lifetime (similar to an IA Address option)

This option is used only when either a 'Sustained' or 'Fixed' IP address is requested, and must encapsulate the **IP Continuity Service Option** to indicate the type of continuity service desired by the requester.

IA_NA Option with an encapsulated Anchor Preference Option

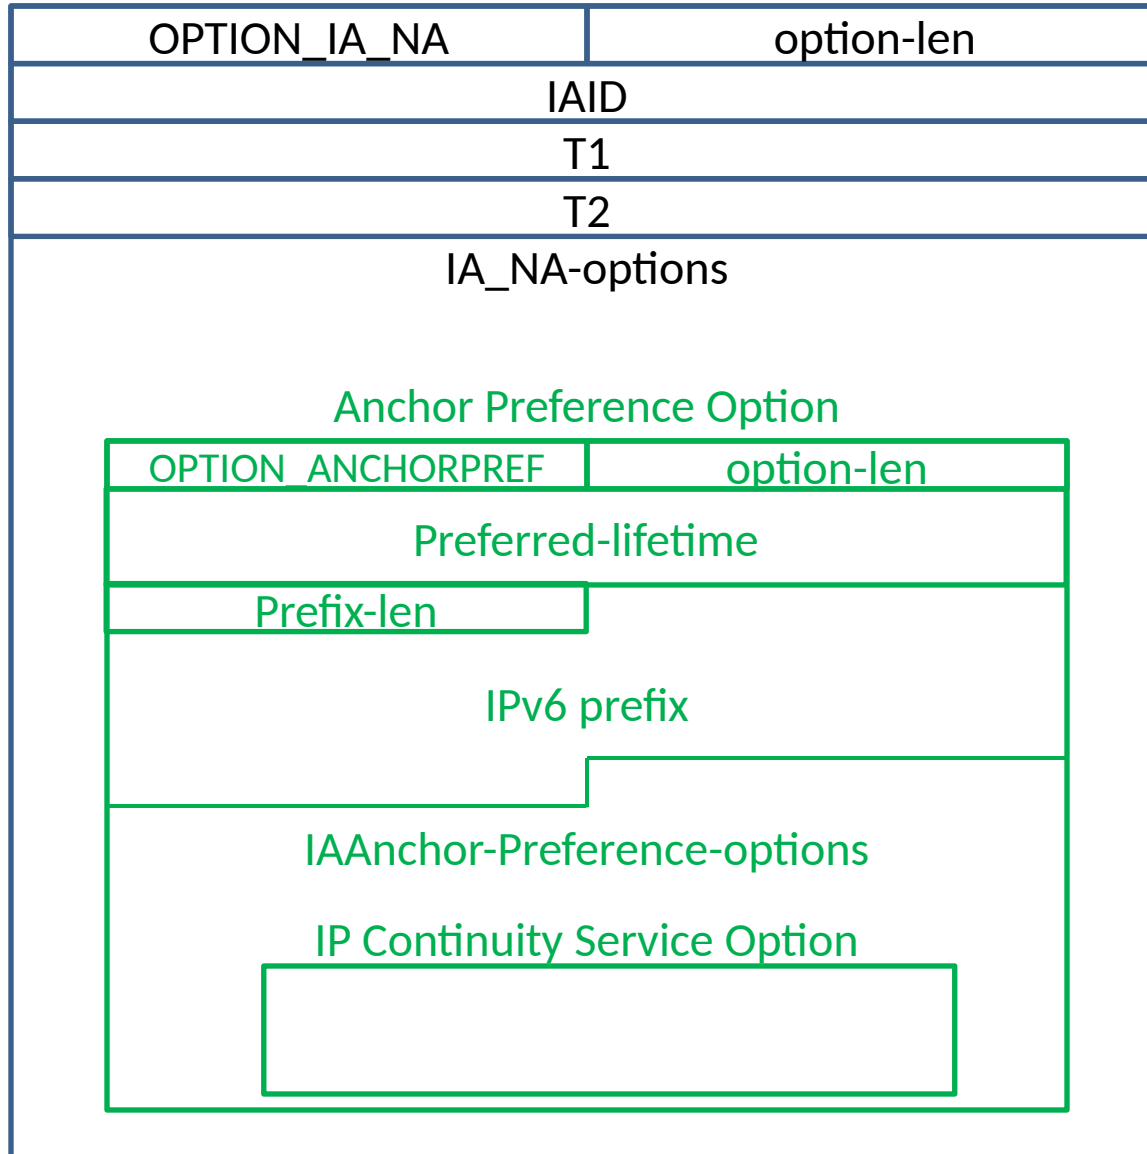

Agenda

Introduction

Quick reminder about DHCPv6 options

Proposed new options

Discussion

Summary

1. A new 'IP Continuity Service Option' –
 - Used by the client to convey the desired address type
 - Used by the server to inform the client of the type of address that was assigned to it
 - Used also to request convey the desired type of IP prefix in Prefix Delegation'
2. A new 'Anchor Preference Option' for a client to indicate its preference of a specific Mobility Anchor to service its traffic

Next steps

Request WG adoption of this draft