

# UAS Operator Privacy for RemoteID Messages

draft-moskowitz-drip-operator-privacy-05

September 23, 2020


Robert Moskowitz

etal.

# From DRIP Charter

The specifications produced by the WG will need to balance public safety authorities' need to know trustworthy information with UAS operators' and other involved parties' privacy.

# Private to Whom?

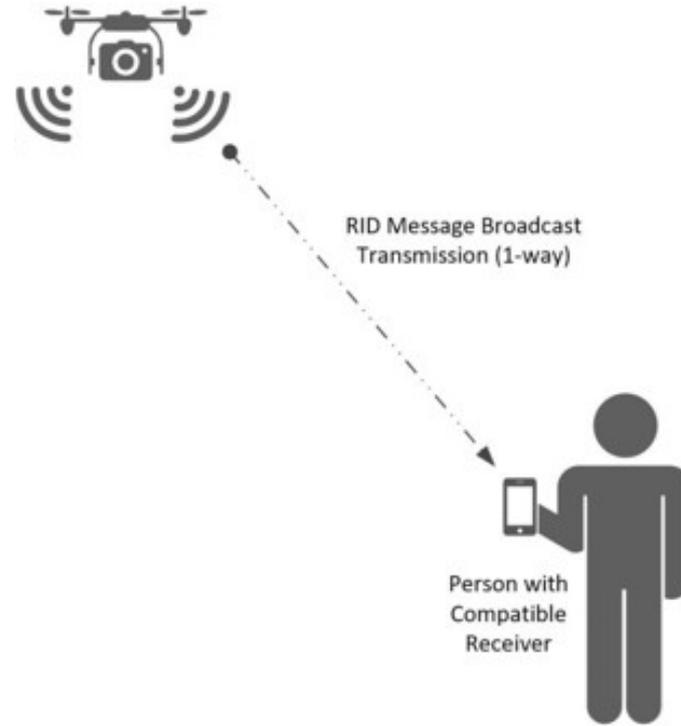

# Problem Statement

- The ASTM F3411-19 Standard messages include UAS Operator PII
  - Operator Location and Operator ID
    - Location may be dynamic – changing during Operation
  - In the clear over Broadcast RemoteID
    - Local regulations MAY mandate in the clear, but not everywhere and/or always
  - No spare bytes in messages for ‘standard’ encryption

# Encrypt the PII?

- Who has access to PII
  - USS for UAS
  - Authorized Entities
    - Local Public Safety
    - UTM?
      - But who to release to?
    - Others?

# How to Encrypt the PII

- UAS SHOULD have business relationship with some USS
  - Thus UAS and USS can share a symmetric key specifically for encrypting PII
  - Authorized entities can ask USS for PII or for key for ongoing realtime access to Operator location PII
    - Can find USS via DRIP RemoteID

# How to Encrypt the PII

- Symmetric cipher MUST
  - Encrypt without expanding clear text
    - No bytes to spare
  - Encrypt multiple messages
    - Operator ID Message
    - Operator Location in multiple System Messages
      - Operator moved 1M...

# How to Encrypt the PII

- Recommend AES-CFB32 with hidden IV
- Symmetric Key derived via Hybrid ECIES Scheme
  - Key Derivation Function now included
    - Uses KMAC

# Why CFB32

- Cipher Feedback mode allows for variable block size like 32 bits
  - NIST SP800-38A
  - 32 bits chosen as size of location fields and ID is multiple of 32
    - Smaller might lead to crypto attack against small changing location
  - Unique IV not needed for each application of CFB

# When to Encrypt

- Hiding PII Conditional
  - Only when allowed by USS
    - USS MAY instruct UAS to stop PII protection
  - Only when UAS has connection to USS
    - e.g. loss of Internet connectivity, or no connective in area
    - UAS Time/location change may change USS instructions
  - Otherwise encrypt!

# Alternatives to CFB32

- Feistel scheme
  - Slow but pretty neat!
- AES-CTR
  - Needs 2 bytes in message for counter
- Open to discuss other options
  - Time spent taking bruises on CFRG list!

# DRIP Requirements met

- PRIV 1 & 2
  - Confidential Handling
  - Encrypted Transport

# DRIP Workgroup Action

- CALL FOR WORKGROUP ADOPTION

QUESTIONS ?