


Target URI Delivery

Jonathan Rosenberg

Cisco

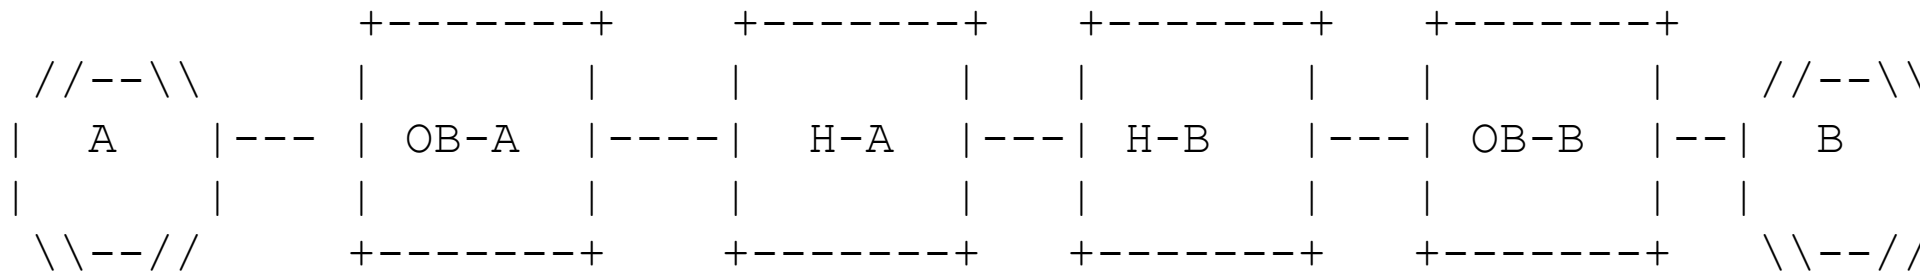

```

INVITE
sip:B@example.com
----->

```

```

    INVITE
    sip:B@example.com
    ----->

```

```

        INVITE
        sip:B@example.com
        ----->

```

```

            INVITE
            sip:B@example.com
            HI: <sip:B@example.com>index=1;target,
                <sip:B@1.2.3.4>;index=1.1

```

```

                ----->

```

Open Issues

- Include discussion on P-Called-Party-ID and why it wasn't used?
- HI target header field rename and/or deprecate value from RFC4458?