

IETF ALARM Module

mbj@tail-f.com

stefan@wallan.se

The Draft

4.	Alarm Module Concepts	5
4.1.	Alarm Definition	5
4.2.	Alarm Type	5
4.3.	Identifying Resource	7
4.4.	Identifying Alarm Instances	7
4.5.	Alarm Life-Cycle	8
4.5.1.	Resource Alarm Life-Cycle	8
4.5.2.	Operator Alarm Life-cycle	9
4.5.3.	Administrative Alarm Life-Cycle	9
4.6.	Root Cause and Impacted Resources	10
4.7.	Alarm Shelving	10
5.	Alarm Data Model	10
5.1.	Alarm Control	12
5.1.1.	Alarm Shelving	13
5.2.	Alarm Inventory	13
5.3.	Alarm Summary	14
5.4.	The Alarm List	14
5.5.	The Shelved Alarms List	16
5.6.	RPCs	16
5.7.	Notifications	16
6.	Alarm YANG Module	16
7.	X.733 Alarm Mapping Data Model	41
8.	X.733 Alarm Mapping YANG Module	42
9.	Security Considerations	48
10.	Acknowledgements	48
11.	References	48
11.1.	Normative References	48
11.2.	Informative References	48
Appendix A.	Vendor-specific Alarm-Types Example	49
Appendix B.	Alarm Inventory Example	50
Appendix C.	Alarm List Example	51
Appendix D.	Alarm Shelving Example	52
Appendix E.	X.733 Mapping Example	53
Appendix F.	Background and Usability Requirements	53
F.1.	Alarm Concepts	54
F.1.1.	Alarm type	54
F.2.	Usability Requirements	55

Alarm Data Model

Features

- Alarm list
 - A list of all alarms.
 - Cleared alarms stay in the list until explicitly removed.
 - Optional alarm history (state changes) [YANG feature]
- Operator actions on alarms [YANG feature]
 - Acknowledging and closing alarms
- Alarm inventory
 - A management application can read all alarm types implemented by the system.
- Alarm shelving [YANG feature]
 - Shelving (blocking) alarms according to specific criteria.
- Administrative actions on alarms
 - Purging alarms from the list according to specific criteria.
- X.733 Mapping [Augmenting module]

What is an alarm?

*An alarm signifies an undesirable state in a resource **that requires corrective action.***

Not events in general


KEY

(resource,	alarm-type,	severity,	clearance-flag)
GigabitEthernet0/25,	linkAlarm,	Major,	-
GigabitEthernet0/25,	linkAlarm,	Major,	Clear
GigabitEthernet0/25,	linkAlarm,	Minor,	-
GigabitEthernet0/25,	linkAlarm,	Minor,	Clear

Alarm State on a resource



This module focuses here!

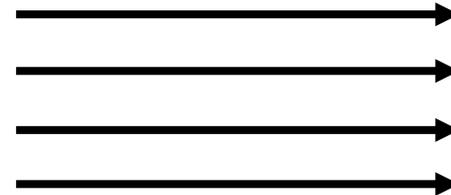

Alarm Notifications



X733 and other alarm modules focus here!

The Alarm List

- Stateful
 - NOT a notification log
- f(alarm-type, resource)
-> current alarm state
- Clearance is separate from severity
- Resource state separate from operator state
 - For example: no manual clear

```
+--ro alarm-list
| +--ro number-of-alarms? yang:gauge32
| +--ro last-changed?   yang:date-and-time
| +--ro alarm* [resource alarm-type-id alarm-type-qualifier]
|   +--ro time-created   yang:date-and-time
|   +--ro resource       resource
|   +--ro alarm-type-id   alarm-type-id
|   +--ro alarm-type-qualifier alarm-type-qualifier
|   +--ro alt-resource*   resource
|   +--ro related-alarm* [resource alarm-type-id alarm-type-qualifier]
|     | +--ro resource
|     | +--ro alarm-type-id
|     | +--ro alarm-type-qualifier
|     +--ro impacted-resource* resource
|     +--ro root-cause-resource* resource
|     +--ro is-cleared      boolean
|     +--ro last-changed   yang:date-and-time
|     +--ro perceived-severity severity
|     +--ro alarm-text      alarm-text
|     +--ro status-change* [time] {alarm-history}?
|       | +--ro time        yang:date-and-time
|       | +--ro perceived-severity severity-with-clear
|       | +--ro alarm-text   alarm-text
|     +--ro operator-state-change* [time] {operator-actions}?
|       | +--ro time        yang:date-and-time
|       | +--ro operator    string
|       | +--ro state        operator-state
|       | +--ro text?        string
|     +---x set-operator-state {operator-actions}?
|       +---w input
|         +---w state operator-state
|         +---w text? string
```

Alarm Type

ietf-alarms.yang

```
typedef alarm-type-id {
  type identityref {
    base alarm-identity;
  }
  description
    "Identifies an alarm type. The description of the alarm type
    id MUST indicate if the alarm type is abstract or not. An
    abstract alarm type is used as a base for other alarm type ids
    and will not be used as a value for an alarm or be present in
    the alarm inventory.";
}

typedef alarm-type-qualifier {
  type string;
  description
    "If an alarm type can not be fully specified at design time by
    alarm-type-id, this string qualifier is used in addition to
    fully define a unique alarm type.

    The definition of alarm qualifiers is considered being part
    of the instrumentation and out of scope for this module.
    An empty string is used when this is part of a key.";
}
```

Enterprise module

```
module example-xyz-alarms {
  namespace "urn:example:xyz-alarms";
  prefix xyz-al;

  import ietf-alarms {
    prefix al;
  }

  identity xyz-alarms {
    base al:alarm-identity;
  }

  identity communications-alarm {
    base xyz-alarms;
  }
  identity quality-of-service-alarm {
    base xyz-alarms;
  }
  identity processing-error-alarm {
    base xyz-alarms;
  }
  identity equipment-alarm {
    base xyz-alarms;
  }
  identity environmental-alarm {
    base xyz-alarms;
  }

  // communications alarms
  identity link-alarm {
    base communications-alarm;
  }

  // QoS alarms
  identity high-jitter-alarm {
    base quality-of-service-alarm;
  }
}
```

Alarm Type and Alarm Type Qualifier

- Alarm Type Qualifier
- Only used when alarm types are not known at design time
 - Example:
Digital input with configured detector type
- Industry practice of X.733
“specific problem”

```
// Alternative 1: concrete alarm type identity
import ietf-alarms {
  prefix al;
}
identity environmental-alarm {
  base al:alarm-type;
  description "Abstract alarm type";
}
identity smoke {
  base environmental-alarm;
  description "Concrete alarm type";
}

// Alternative 2: concrete alarm type qualifier
import ietf-alarms {
  prefix al;
}
identity environmental-alarm {
  base al:alarm-type;
  description "Abstract alarm type";
}
identity external-detector {
  base environmental-alarm;
  description
    "Abstract alarm type, a run-time configuration
    procedure sets the type of alarm detected. This will
    be reported in the alarm-qualifier.";
}
}
```

Identifying Resources

- Instance Identifier
- SNMP OID
- String for other naming schemes like DN
- Part of key
- The alarm allows for alternate naming like referring to the interface SNMP OID

```
typedef resource {  
  type union {  
    type instance-identifier {  
      require-instance false;  
    }  
    type yang:object-identifier;  
    type string;  
  }  
}
```



```
+--ro alarm* [resource alarm-type-id alarm-type-qualifier]  
  +--ro time-created          yang:date-and-time  
  +--ro resource              resource  
  +--ro alarm-type-id        alarm-type-id  
  +--ro alarm-type-qualifier alarm-type-qualifier  
  +--ro alt-resource*        resource
```

Alarm Life-Cycle

- Resource View
 - Severity, Clearance, Text
- Operator View
 - Ack, Close
- Admin View
 - Delete alarms
 - Compress alarm history

```
+---ro alarm* [resource alarm-type-id alarm-type-qualifier]
    ...
+---ro is-cleared                boolean
+---ro last-changed              yang:date-and-time
+---ro perceived-severity        severity
+---ro alarm-text                alarm-text
+---ro status-change* [time]
    +---ro time                  yang:date-and-time
    +---ro perceived-severity    severity
    +---ro alarm-text            alarm-text
```

```
+---ro alarm* [resource alarm-type-id alarm-type-qualifier]
    ...
+---ro operator-state-change* [time] {operator-actions}?
|   +---ro time                yang:date-and-time
|   +---ro operator            string
|   +---ro state                operator-state
|   +---ro text?               string
+----x set-operator-state {operator-actions}?
    +---w input
    +---w state                operator-state
    +---w text?                string
```

Alarm Inventory

- Possible alarms?
- For which resources?
- Can the operator expect an alarm clearance?

```
+--ro alarm-inventory
| +--ro alarm-type* [alarm-type-id alarm-type-qualifier]
|   +--ro alarm-type-id      alarm-type-id
|   +--ro alarm-type-qualifier alarm-type-qualifier
|   +--ro resource*         string
|   +--ro has-clear         boolean
|   +--ro severity-levels*  severity
|   +--ro description       string
```

Alarm Shelving

```
-rw alarm-shelving {alarm-shelving}?
+--rw shelf* [shelf-name]
  +--rw shelf-name          string
  +--rw resource?           resource
  +--rw alarm-type-id?      alarm-type-id
  +--rw alarm-type-qualifier? alarm-type-qualifier
  +--rw description?        string
```

- “Filtering/Blocking”
- Move the blocked alarms to the shelf

```
-ro shelved-alarms {alarm-shelving}?
+--ro number-of-shelved-alarms? yang:gauge32
+--ro alarm-shelf-last-changed? yang:date-and-time
+--ro shelved-alarm*
  [resource alarm-type-id alarm-type-qualifier]
  +--ro resource                resource
  +--ro alarm-type-id           alarm-type-id
  +--ro alarm-type-qualifier    alarm-type-qualifier
  +--ro alt-resource*           resource
  +--ro related-alarm*
    [resource alarm-type-id alarm-type-qualifier]
    | +--ro resource
    | |           -> /alarms/alarm-list/alarm/resource
    | +--ro alarm-type-id      leafref
    | +--ro alarm-type-qualifier leafref
  +--ro impacted-resource*      resource
  +--ro root-cause-resource*    resource
  +--ro is-cleared              boolean
  +--ro last-changed            yang:date-and-time
  +--ro perceived-severity      severity
  +--ro alarm-text              alarm-text
  +--ro status-change* [time] {alarm-history}?
    | +--ro time                yang:date-and-time
    | +--ro perceived-severity  severity-with-clear
    | +--ro alarm-text          alarm-text
  +--ro operator-state-change* [time] {operator-actions}?
    +--ro time                  yang:date-and-time
```

Notifications

- Alarm state change notification
- Operator state change notification
- Alarm Inventory changed

RPCs/Actions

- Purge
 - Delete alarms based on specific criteria
 - For example: all alarms with:
 - operator state closed
 - clearance flag true
 - Last changed: older than 24h
- Compress
 - Compress the alarm history
- Set operator state for an alarm

X733 Mapping

- Augments alarm list, alarm inventory and alarm notification with X733 parameters
- Optional feature to configure the X733 mapping

```
module: ietf-alarms-x733
augment /al:alarms/al:alarm-inventory/al:alarm-type:
  +--ro event-type?          event-type
  +--ro probable-cause?     uint32
augment /al:alarms/al:control:
  +--rw x733-mapping* [alarm-type-id alarm-type-qualifier-match]
                      {configure-x733-mapping}?
  +--rw alarm-type-id       al:alarm-type-id
  +--rw alarm-type-qualifier-match string
  +--rw event-type?        event-type
  +--rw probable-cause?    uint32
augment /al:alarms/al:alarm-list/al:alarm:
  +--ro event-type?        event-type
  +--ro probable-cause?    uint32
augment /al:alarms/al:shelved-alarms/al:shelved-alarm:
  +--ro event-type?        event-type
  +--ro probable-cause?    uint32
augment /al:alarm-notification:
  +---- event-type?        event-type
  +---- probable-cause?    uint32
```