

SIPREC

Recording Metadata

(draft-ietf-siprec-metadata-11)

March 13th 2013

IETF 86 meeting

Authors: Ram Mohan R, R Parthasarathi, Paul Kyzivat


Agenda

- Changes in draft-ietf-siprec-metadata-11 from -09 & -10 version.
- Discuss Open & closed items in Metadata
- Next Steps

Changes from -09 & -10 version

- The new version of draft has following changes:
 - Metadata version indicator inclusion
 - Metadata Model Object Instances (Appendix A) and Metadata XML schema Examples (Appendix B) are removed

Metadata Model Open item: Communication Session

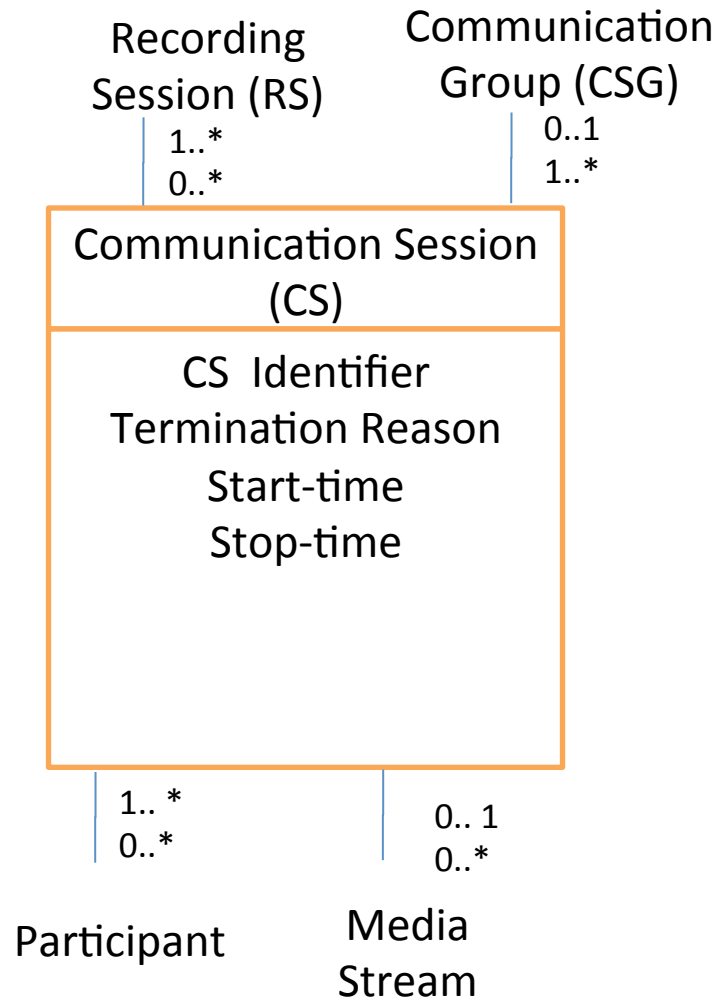

- Any objection for Termination reason XML tag MUST be as per RFC 3326 format?

Example of proposed new Reason syntax

```
<reason cause="200" protocol="SIP">
```

```
    Call completed elsewhere</reason>
```

```
<reason cause="16" protocol="Q.850">
```

```
    Terminated</reason>
```

We can make protocol="SIP" the default to make it more concise.

Clarification regarding use of Common UUID from multiple SRC

Propose to add the following to Sec 6.10 (Unique Id format):

“A common UUID MAY be passed by multiple SRCs to a single SRS. The mechanism in which the SRCs exchange this identifier is outside the scope of this document .“

Next steps

- Update draft based on the current closure
- Ask for WGLC on -12 revision