

DTLS in SDP


`draft-rescorla-dtls-in-sdp`

Eric Rescorla


Mozilla


`ekr@rtfm.com`




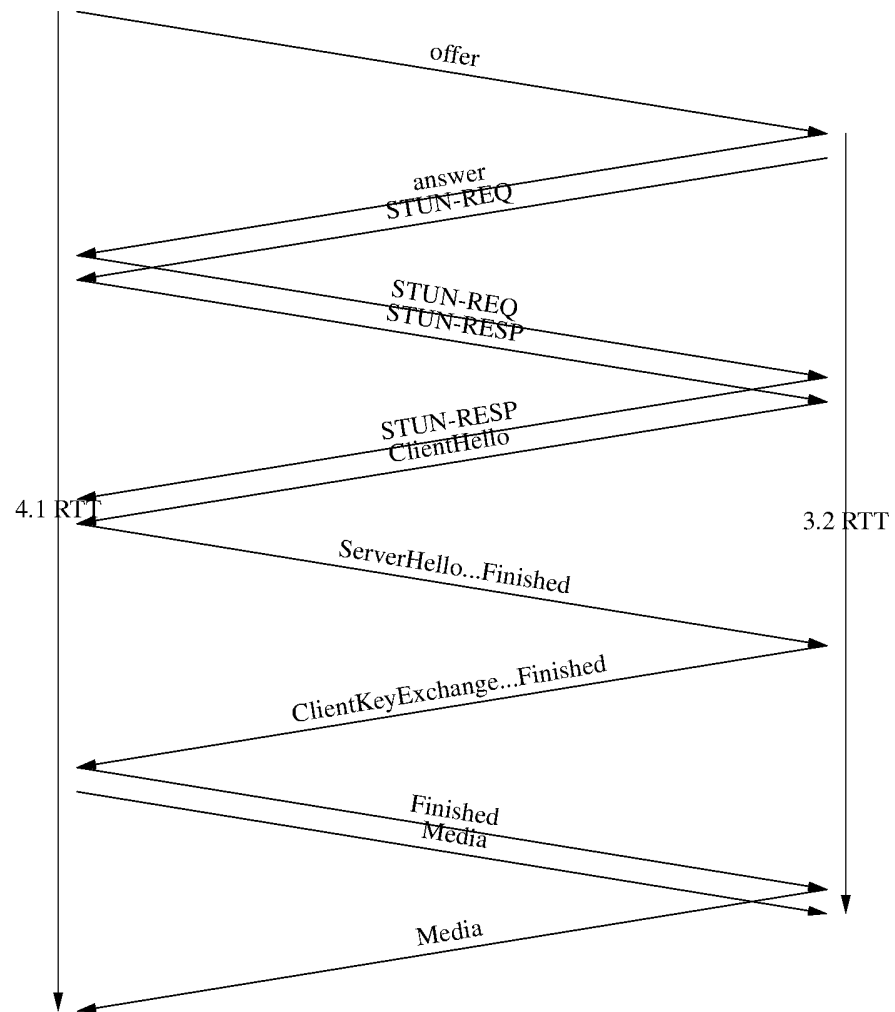



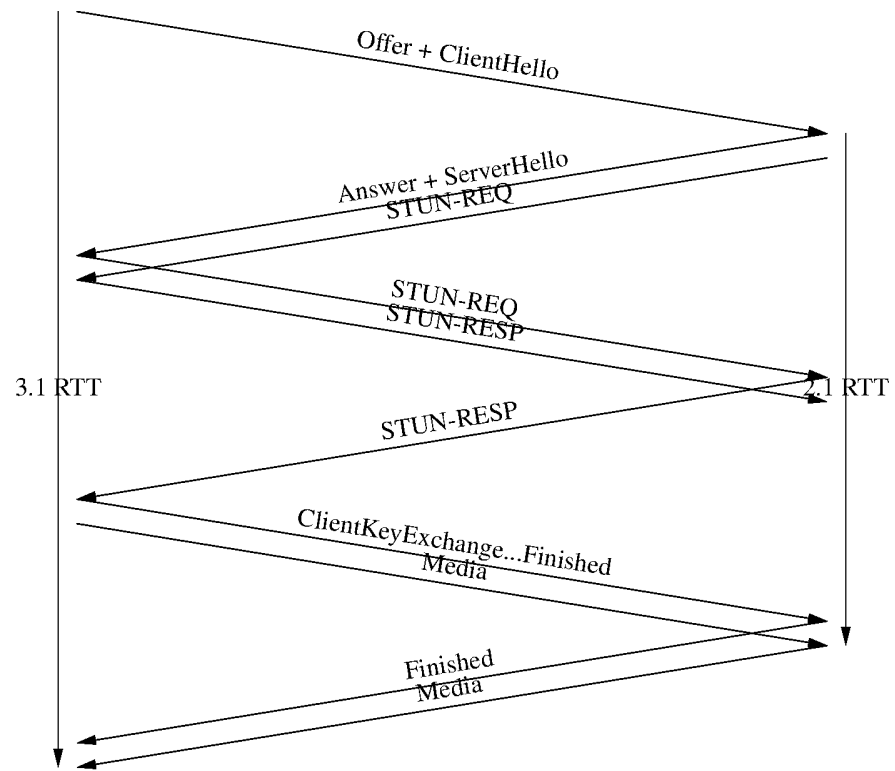

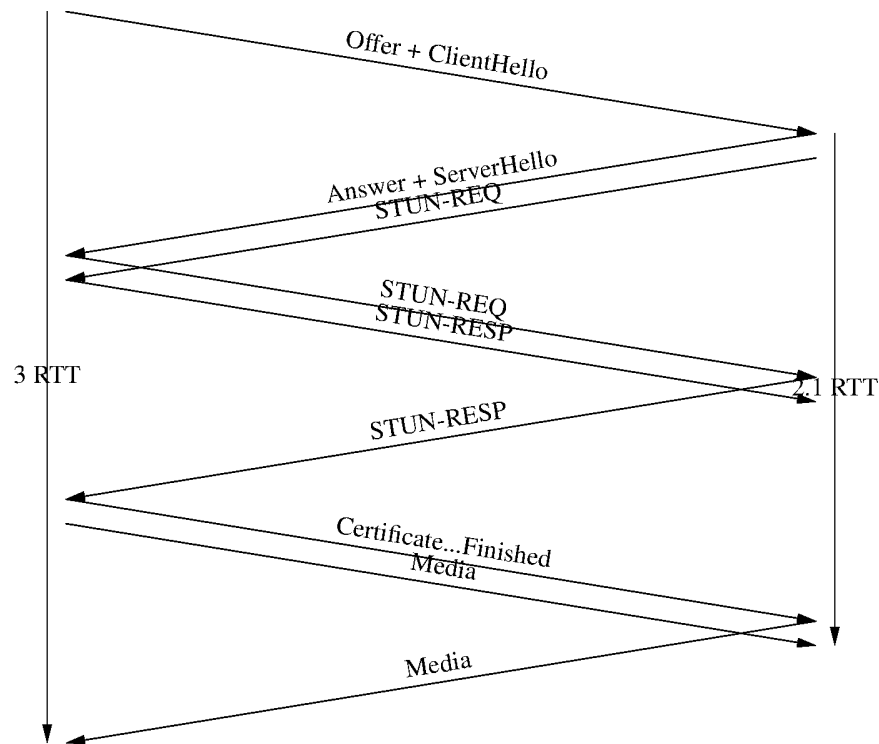

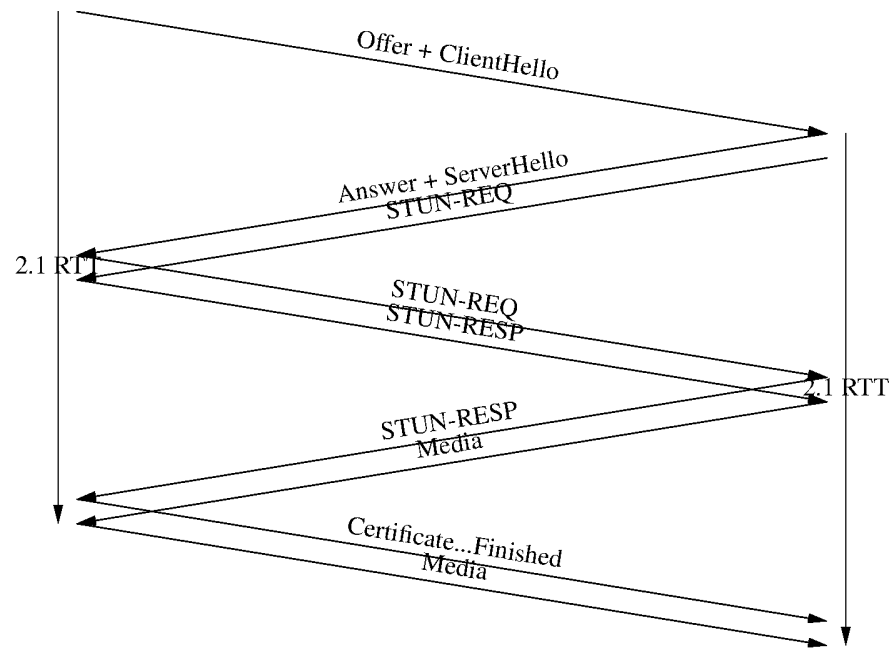

What about forking?

- ClientHellos can't be processed by two servers
 - ... well maybe they can but it seems horrifying
- Probably need some mechanism for forcing the media plane mode on forks
 - Probably easier for WebRTC apps
 - Ideas for non-WebRTC
- Maybe some other clever ideas

Security considerations

- Needs to be covered by identity
- Ultimately rooted in the user's key pair

