

Seamless Multicast Handover in a Hierarchical Mobile IPv6 Environment (M-HMIPv6)

63rd IETF, Paris 2005

Thomas C. Schmidt, Matthias Wählisch

{schmidt, mw}@fhtw-berlin.de

HAW Hamburg & FHTW Berlin



Outline

- 🕒 Problem Statement
- 🕒 Why start from HMIPv6?
- 🕒 M-HMIPv6
- 🕒 Conclusions & Outlook



The Problem: Mobile Multicast

- ! Mcast in low bandwidth mobile environments
- ! Seamless data service for multimedia streams
 - o Mcast applications source address aware (HoA)
 - o Routing: asymmetric, slow convergence
 - up to ≈ 30 s at listener
 - up to ≈ 3 min at sender
 - Routing source address dependent (CoA)
 - o Comply with common mobility/
multicast infrastructure



M-HMIPv6 Approach

draft-schmidt-waehlich-mhmipv6-03

- o Agent based: MAP as Multicast agent
- o Mobile multicast reception and source
- o Built on Hierarchical MIPv6 (HMIPv6)
 - Micro mobile handovers hidden by MAP
 - Reactive handovers between MAPs
 - Unicast (tunnel) forwarding MN : MAP
 - Extends signalling of HMIPv6 by multicast advertisement flag
- o Independent of Mcast Routing Protocol

Why Based on HMIPv6?

- o HA tunnelling (BT): topological triangle
- o Find local agents to shield mobility
- o Use unicast infrastructure with minor extensions
- o Reduce handover frequencies
- o Reactive handover pleasant for multicast routing
- o Low signalling overhead
- o Robustness easy to achieve



Analysing Handover Performance

Questions:


- How many Processed HOs?
- Packet loss on HO?
- Correctness of Predictions?

Relevant quantities:

- Cell residence time
- Call holding time
- AR-to-MAP ratio

Modelling assumptions:

- Cell residence & call holding time exp. distributed (homogeneous distribution)

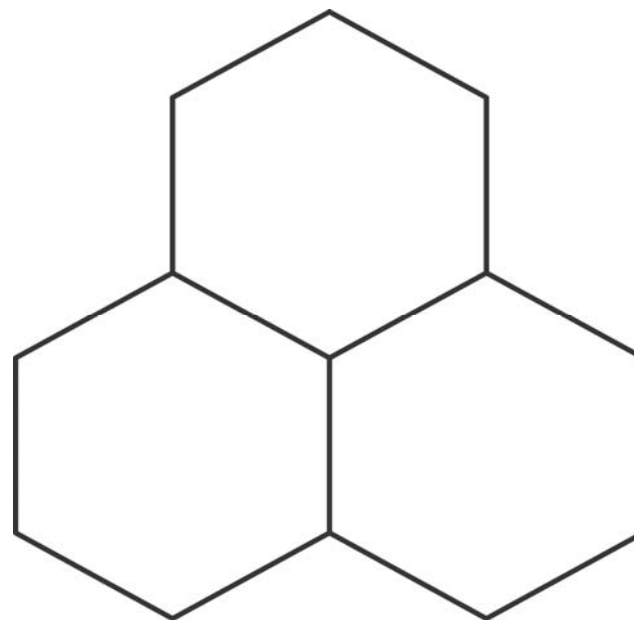

Handover Frequencies


Analytical result:

ρ = Call-to-mobility
factor

k = AR-to-MAP ratio


Expected # of HOs:

$$E[HO] = \frac{1}{k\rho^2} + \frac{1}{\sqrt{k\rho}}$$

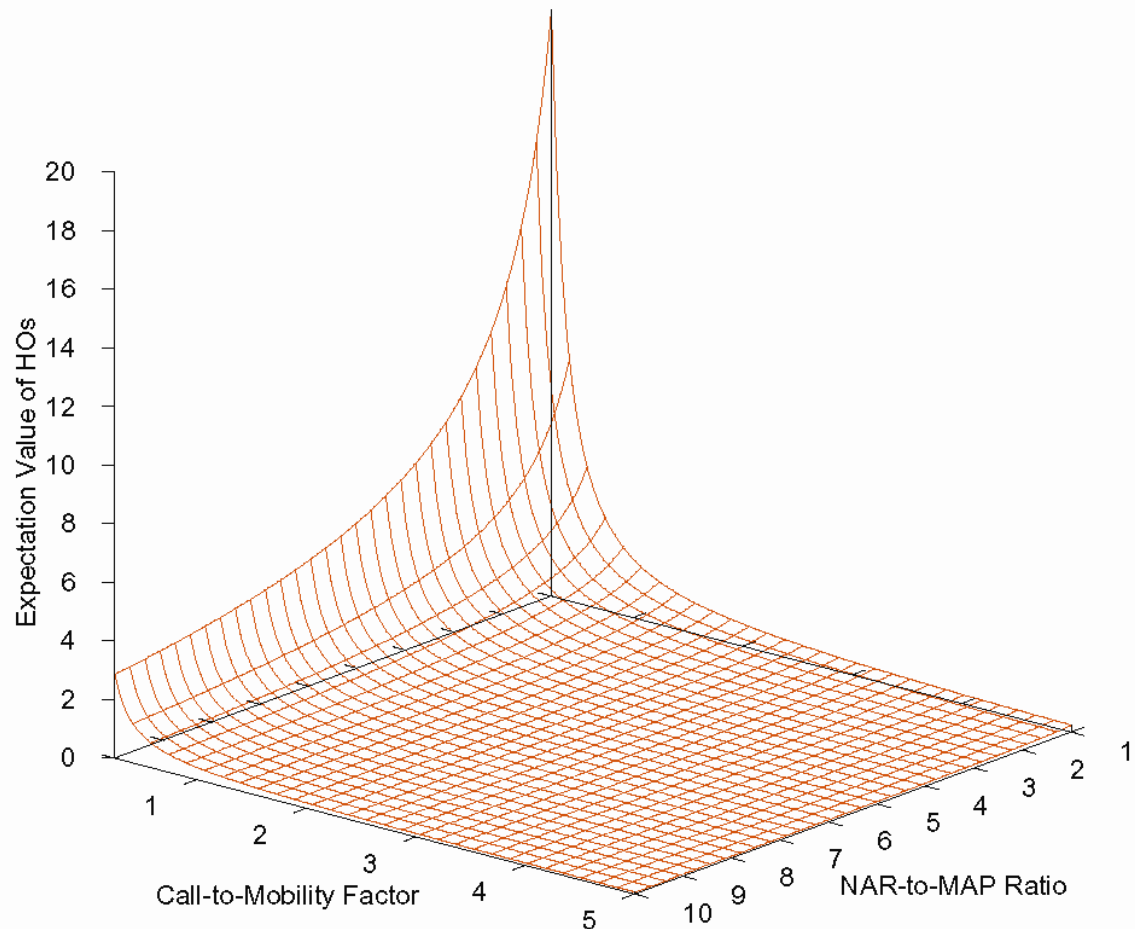


Results for high mobility: Ratio approaches 1 : 10

Predictive versus Reactive HO?

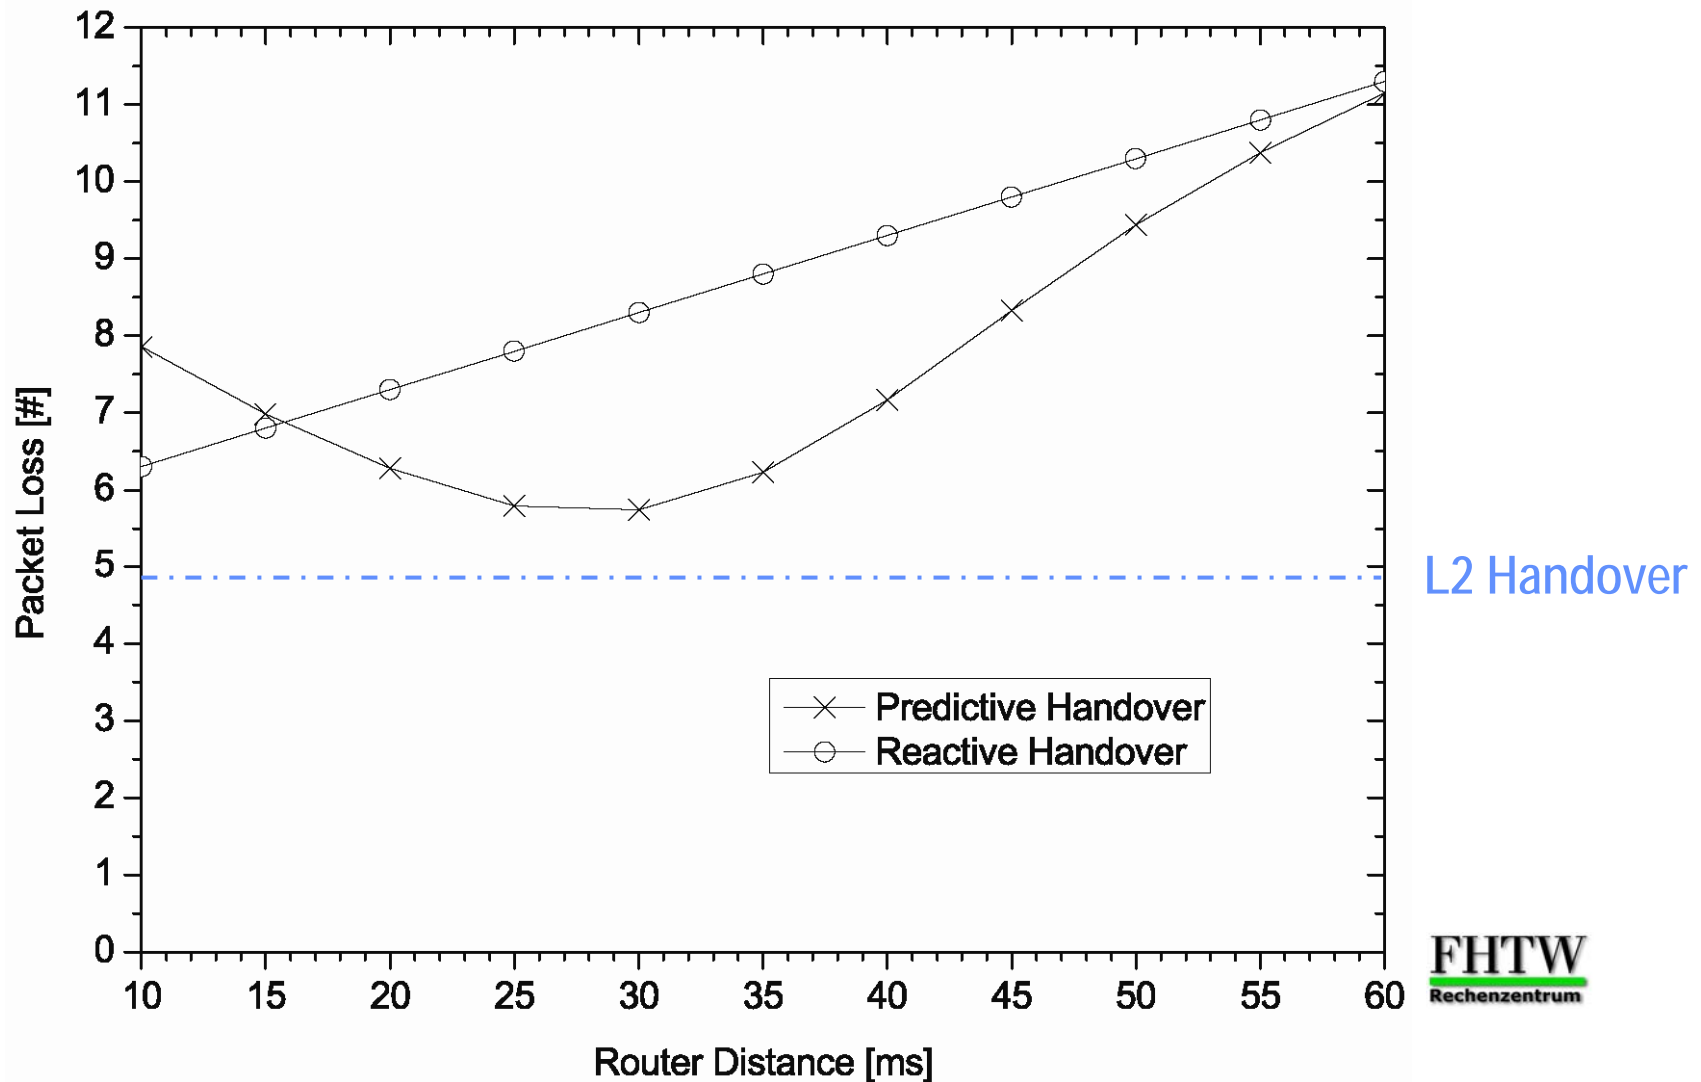


Erroneous Prediction Yields

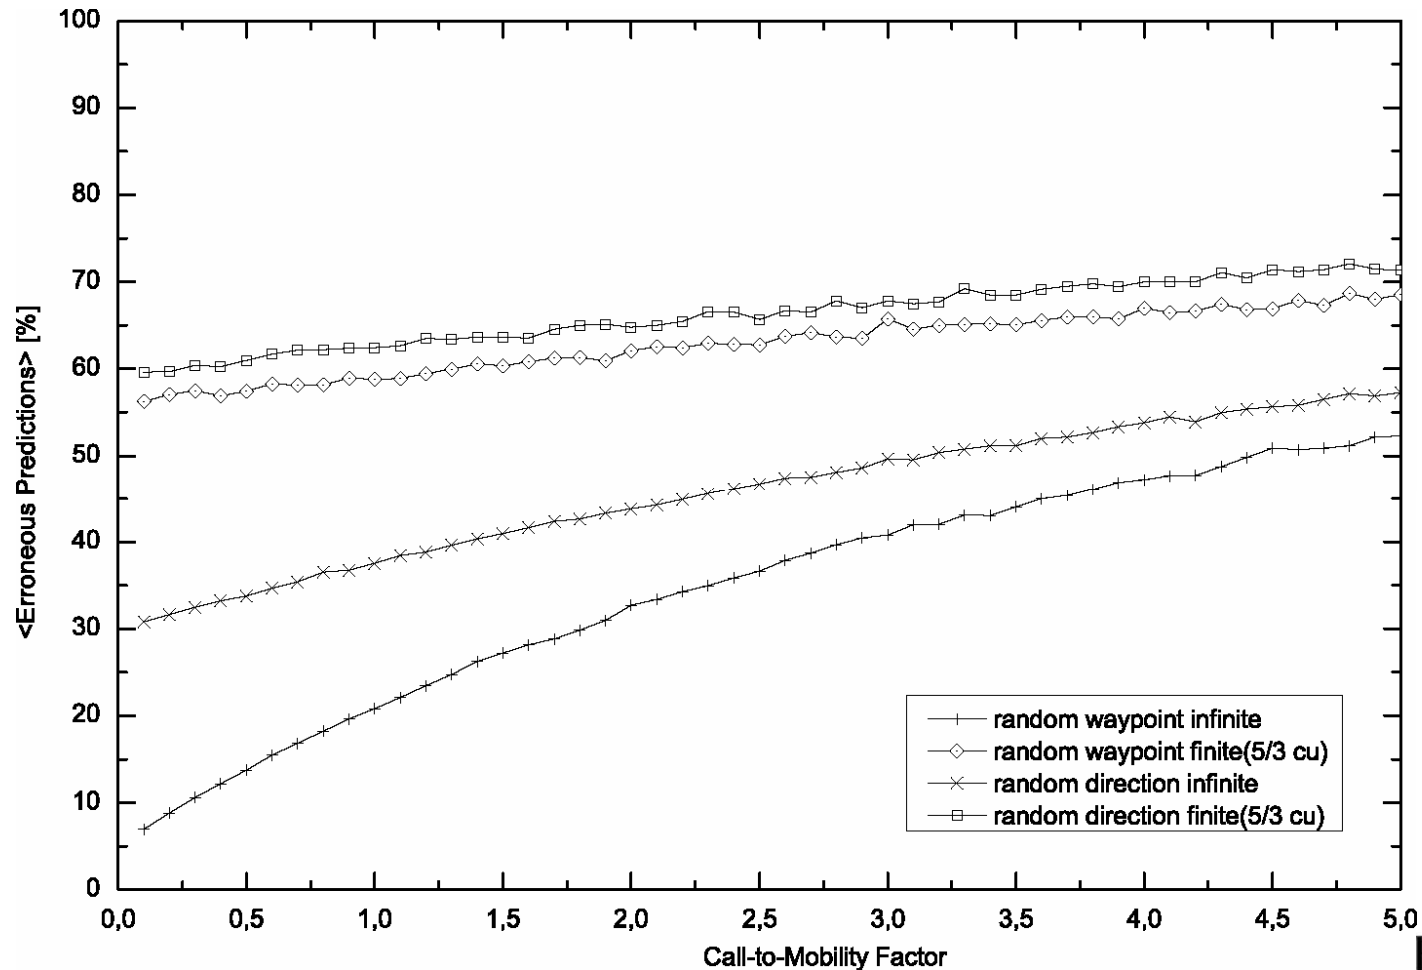


Schmidt, Wählisch: "Predictive versus Reactive – Analysis of Handover Performance and its Implications on IPv6 and Multicast Mobility." In: *Telecommunication Systems*, to appear 2005.


M-HMIPv6: Multicast Source

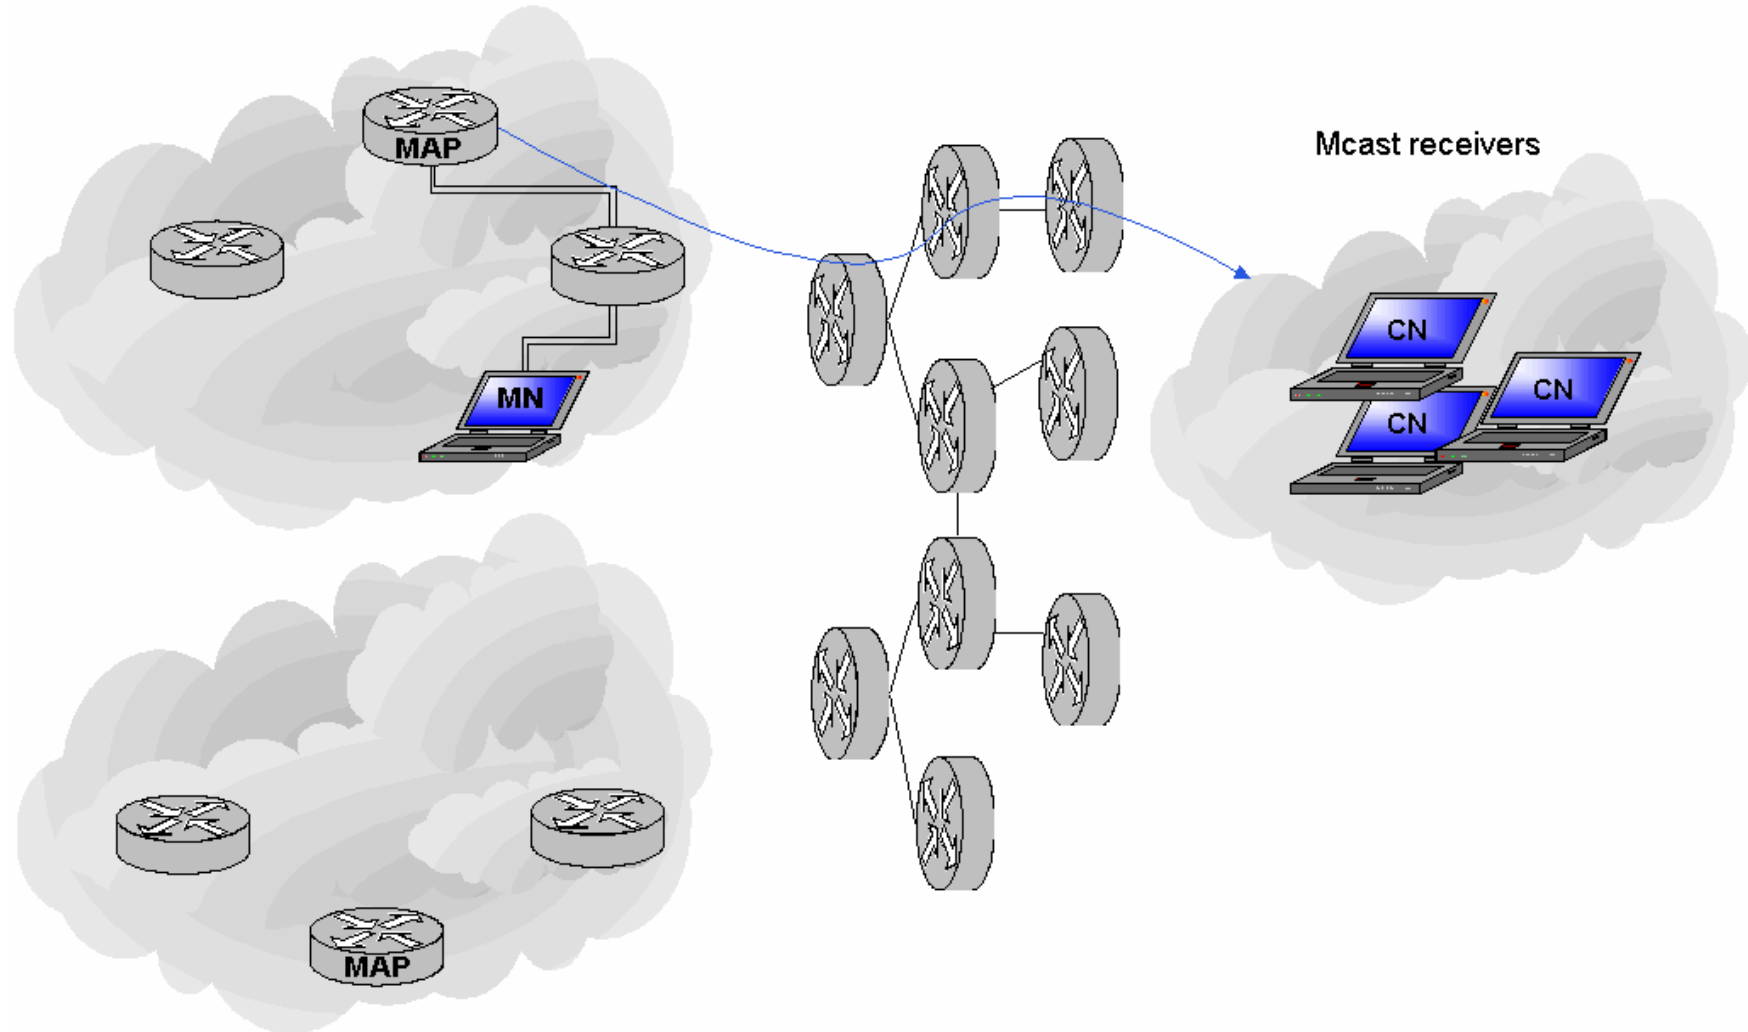


M-HMIPv6: MAP-Local Handover

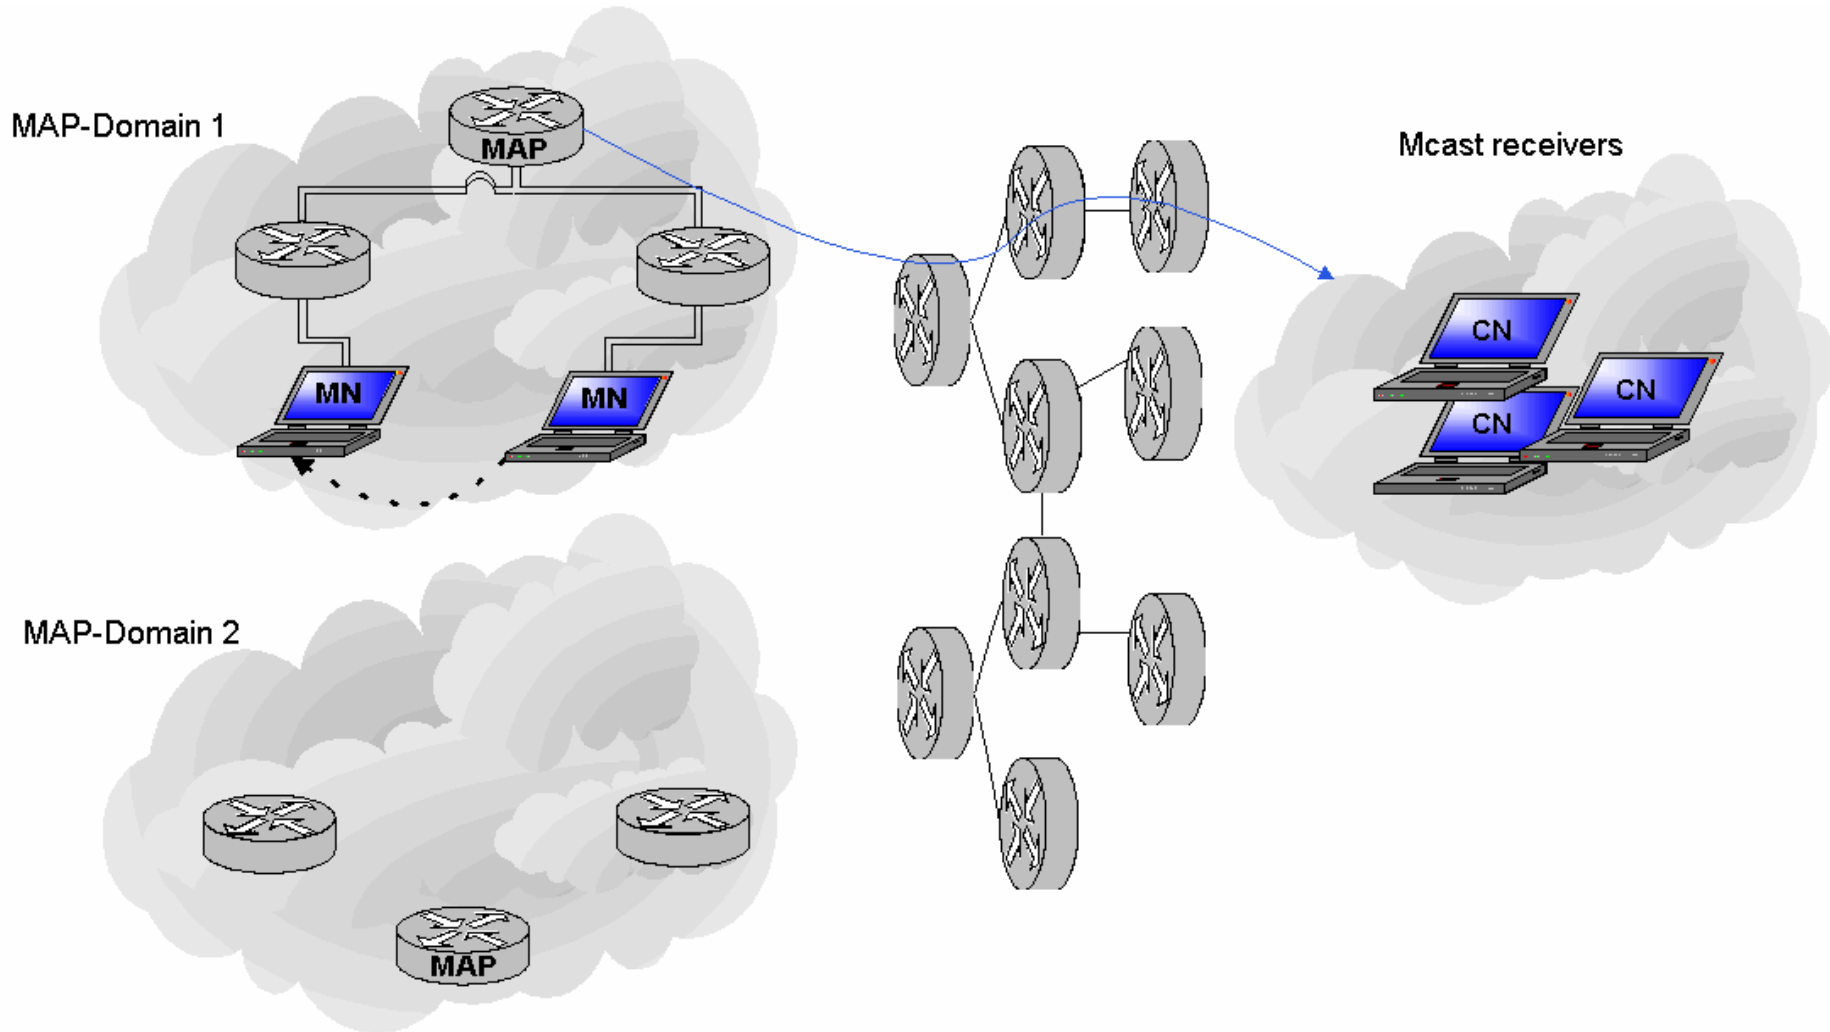

M-HMIPv6: Inter-MAP Handover (1)

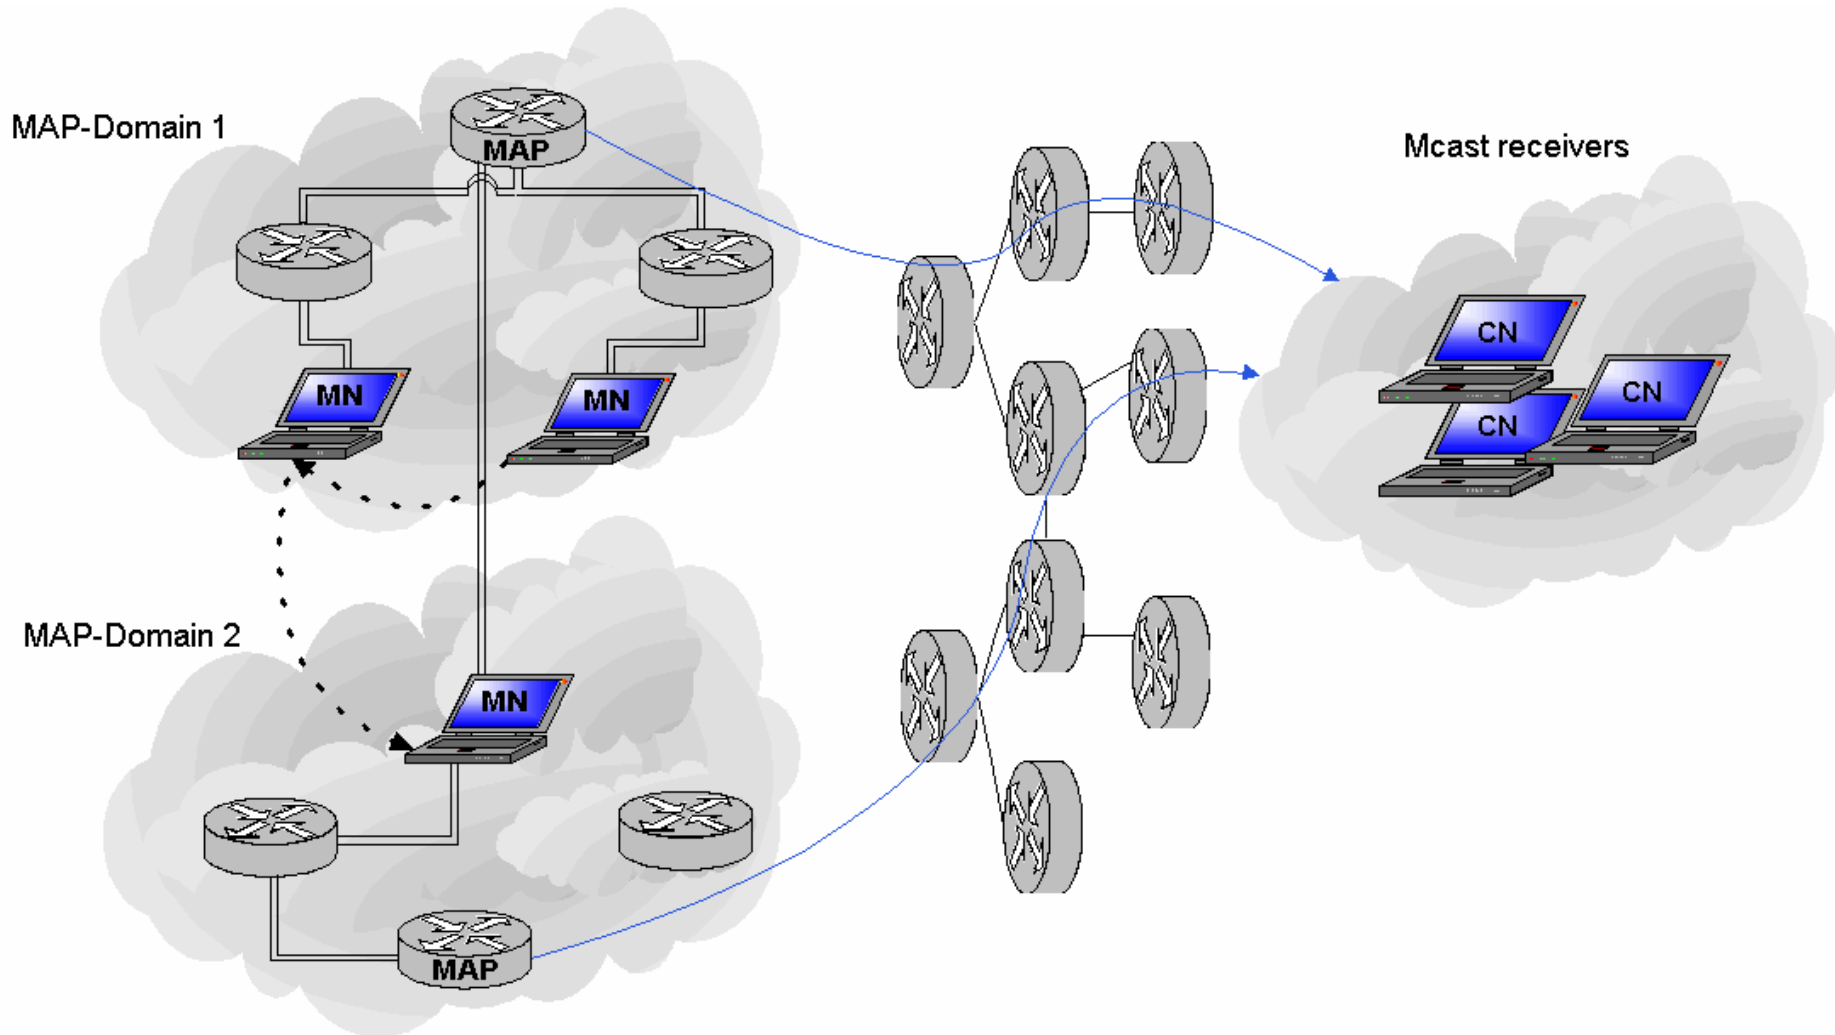

M-HMIPv6: Inter-MAP Handover (2)

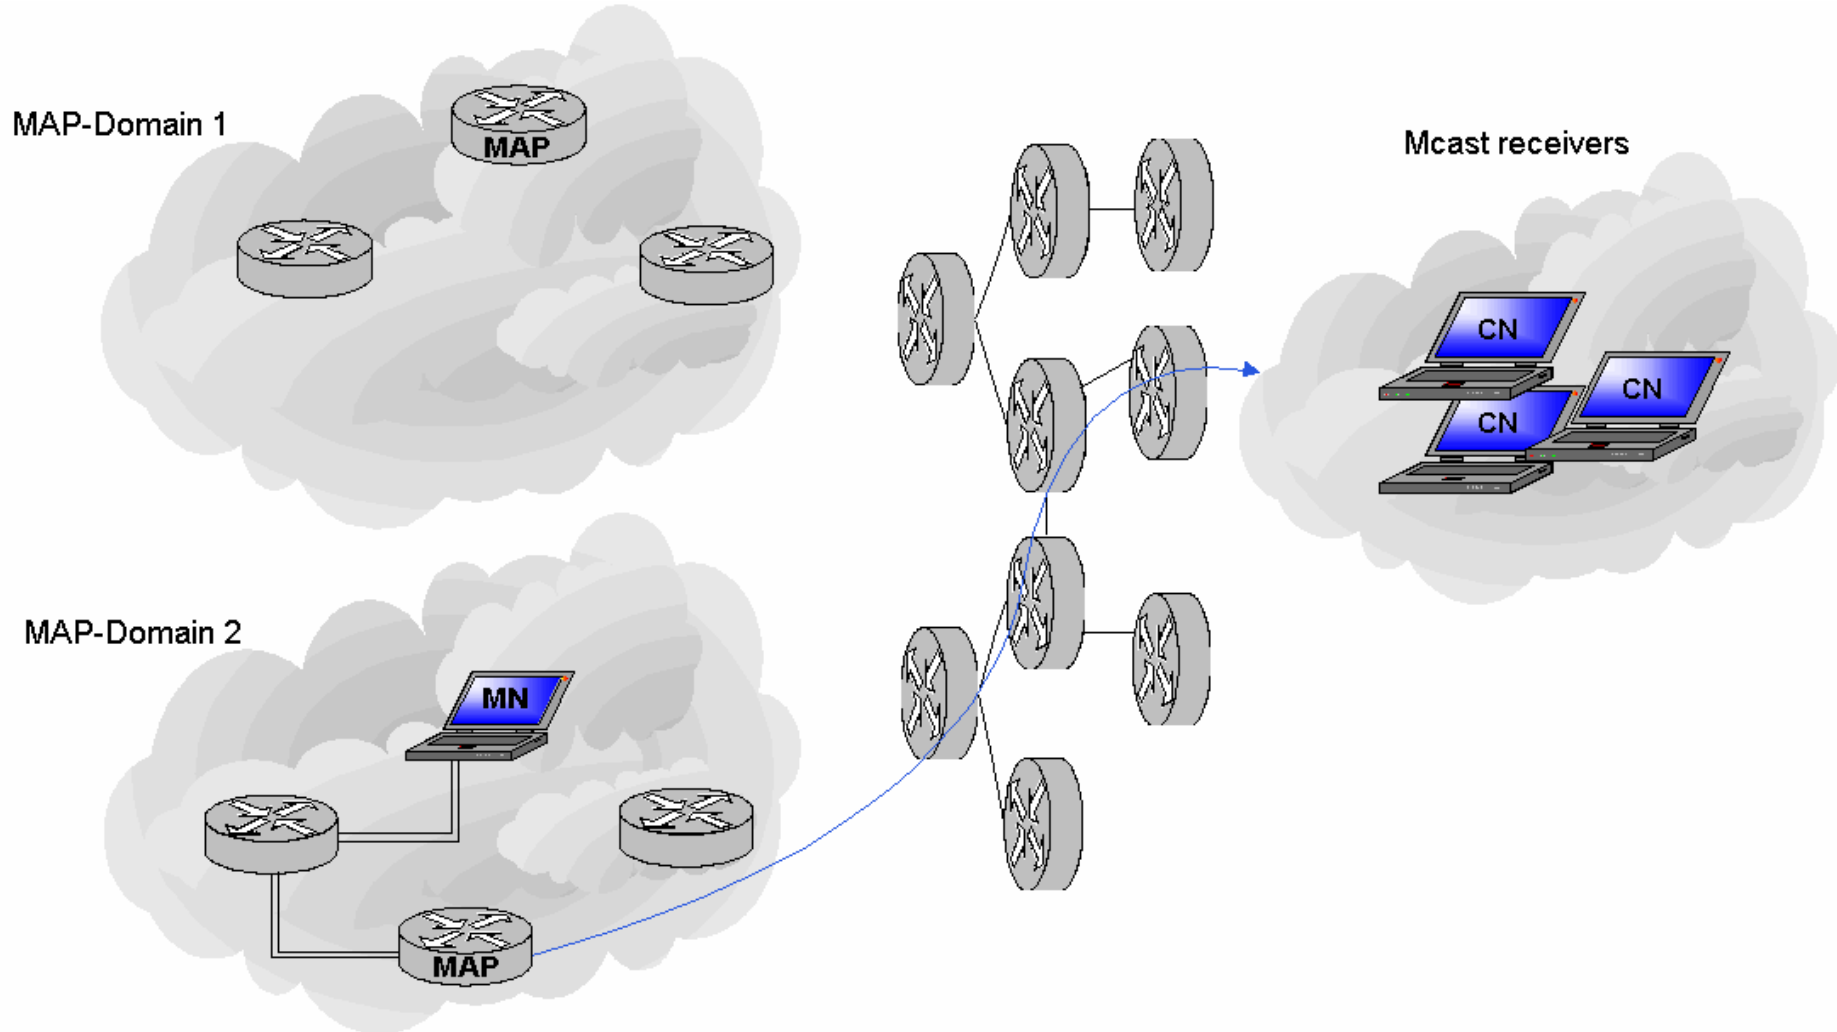

M-HMIPv6: Mobile Multicast Listener

Anchored at MAP:

- o MN : MAP – tunnel using RCoA
- o Group membership management through MAP
- o On Intra-MAP handover: unicast BU (HMIPv6)
- o On Inter-MAP handover:
 - BU with previous MAP (packet forwarding)
 - Subscribe through new MAP
 - On traffic reception: BU with 0 lifetime (stop forwarding)
- o Optimisation: Remote subscription with MAP attendance



M-HMIPv6: Mobile Multicast Sender

Anchored at MAP:

- o MN : MAP – tunnel using RCoA + HoA option
- o Use separate/no binding cache (unicast hijacking)
- o On Intra-MAP handover: unicast BU (HMIPv6)
- o On Inter-MAP handover:
 - BU with previous MAP (continue packet submission)
 - Tree initialisation through new MAP:
Send empty probes (IPv6-NoNxt value)
 - HO on (protocol dependent) timeout
- o No bi-casting needed



Robustness

o Topology

M-HMIPv6 is unaffected by long distance topology
(local 'step size' only)

o Rapid Movement

M-HMIPv6: Remain with previously
established MAP (or HA)

→ Forwarding will function for large scale of
handover frequency, but delays may increase

o M-HMIPv6 smoothly extends BT



Conclusions & Outlook

M-HMIPv6:

- Smooth handover within unicast infrastructure
- Reduced # of handovers
- 'Smoothed' mcast routing, robust in rapid mobility

Future Work:


- Follow HMIPv6 development
- Look at Multicast Source Mobility for SSM
- ?? Your comments/ideas for improvement ??

Backup Slides


- o HO Performance
- o HO Frequencies




Predictive versus Reactive: Analytical Comparison

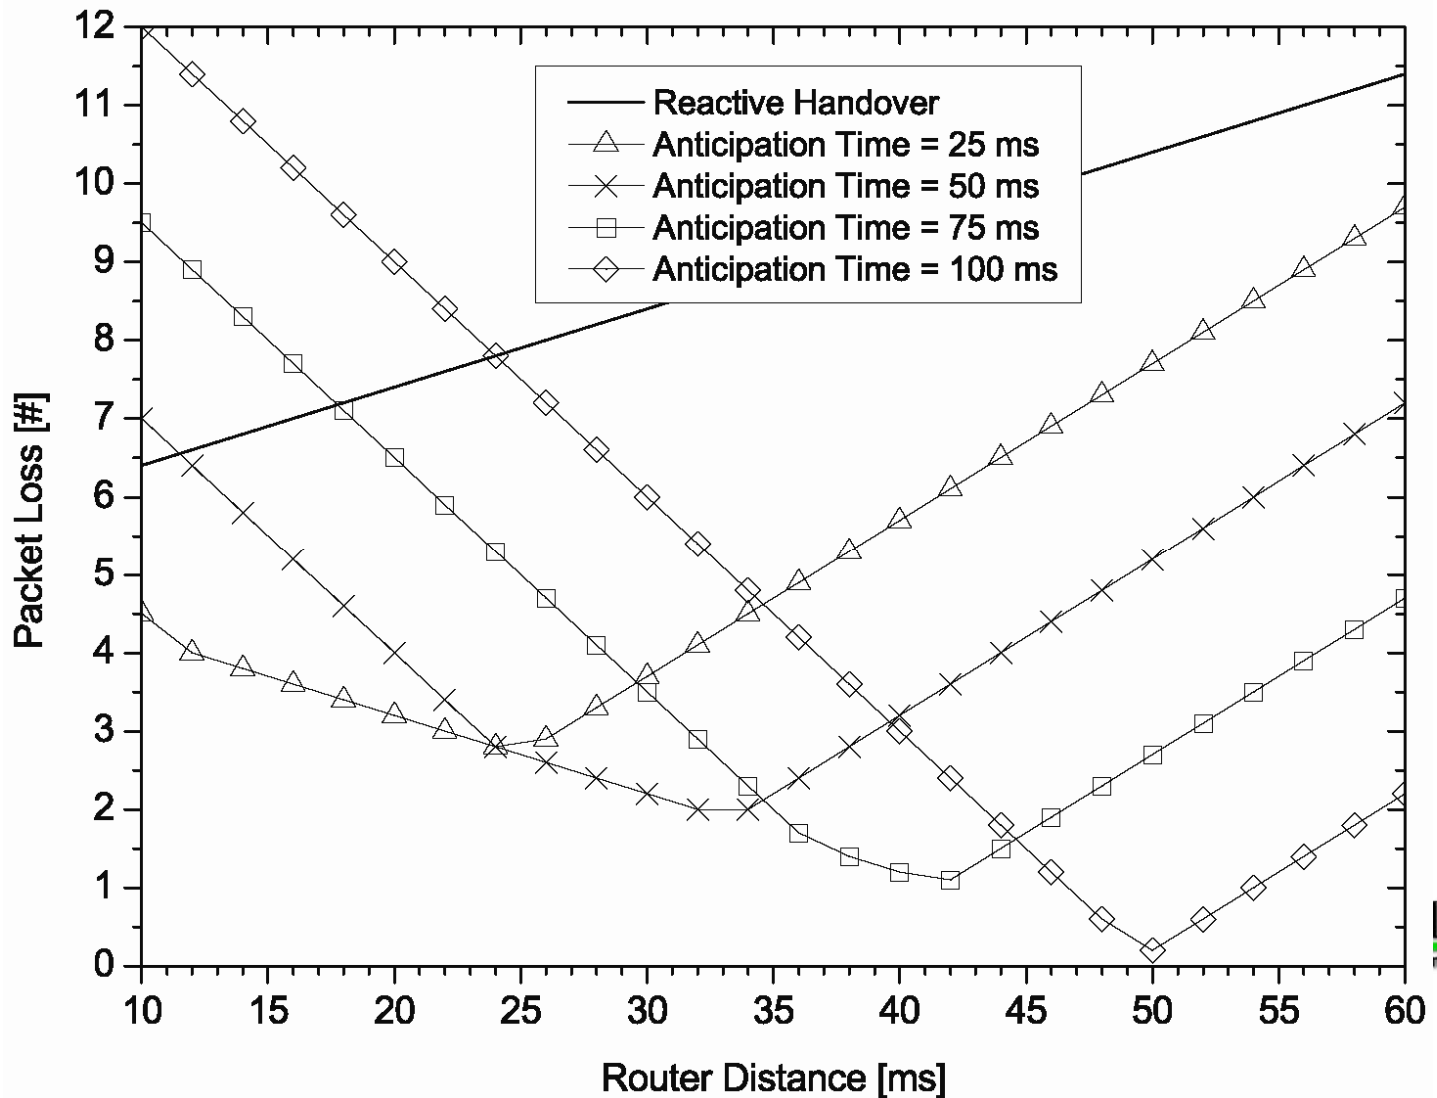


Predictive versus Reactive: Simulations

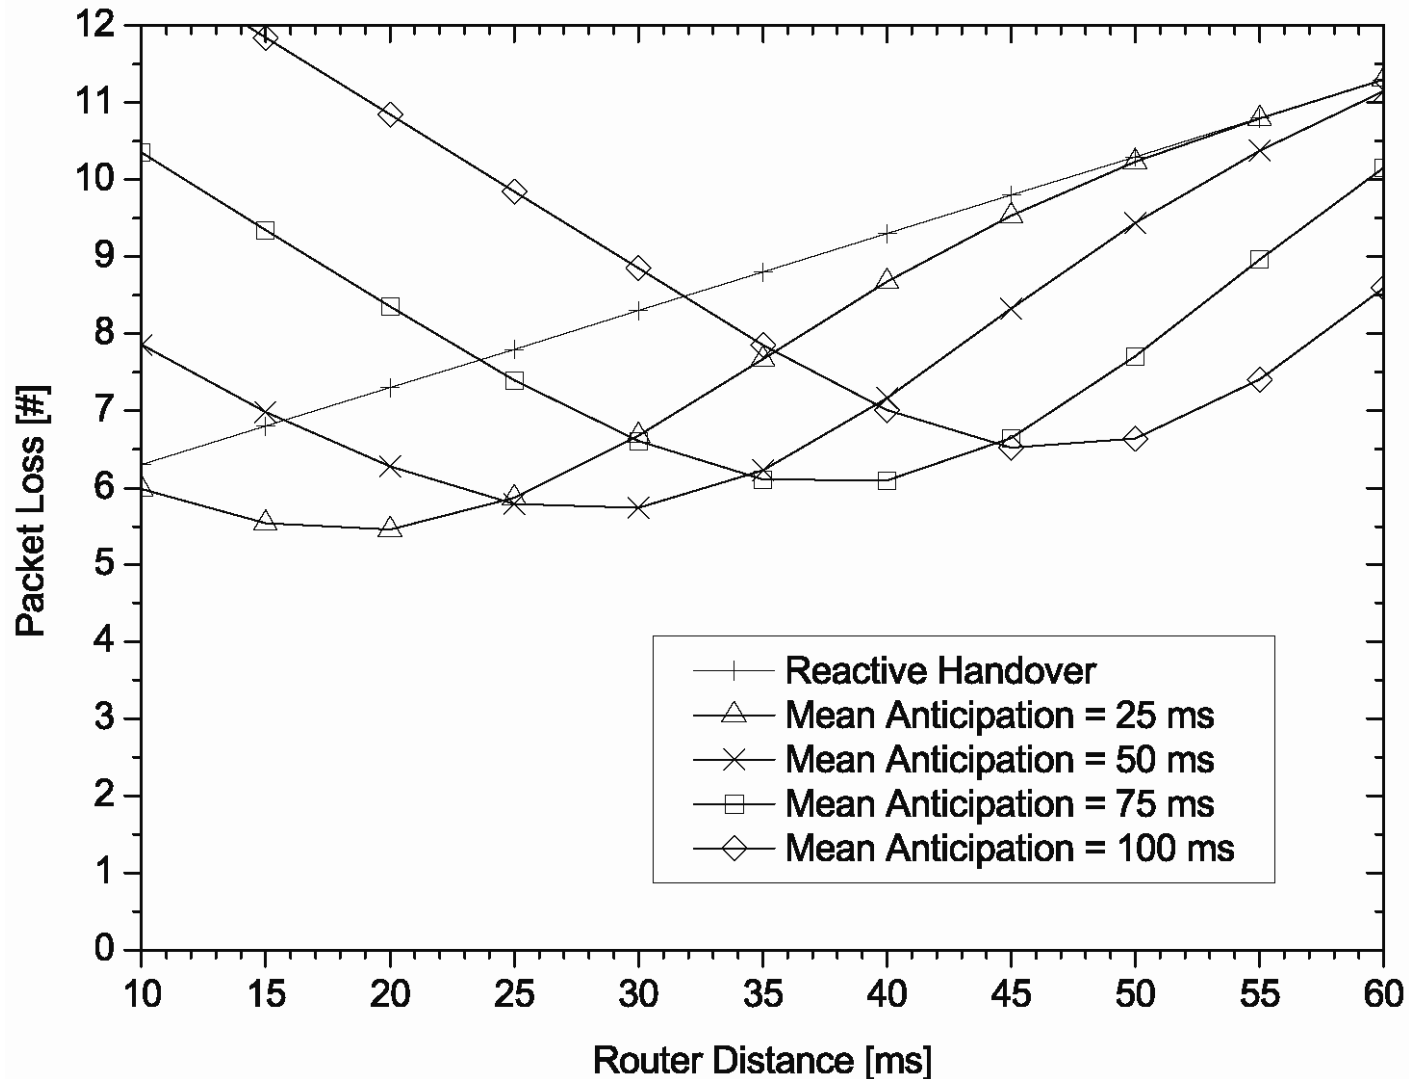

Problem: Completing the Prediction

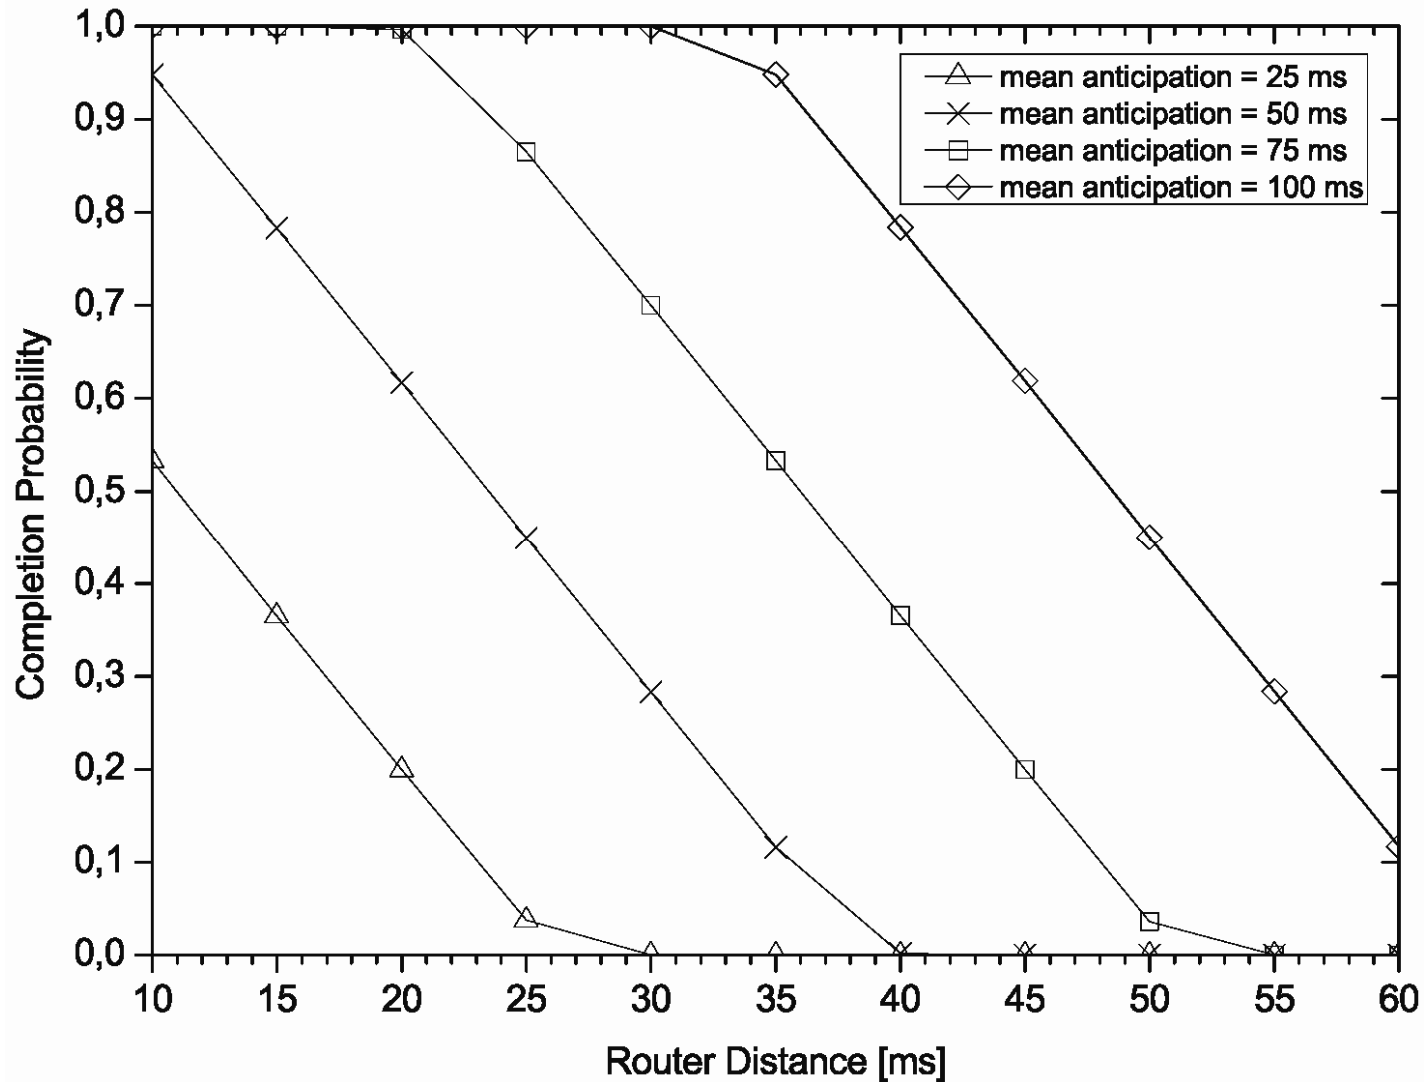

Handover Predictions: Stochastic Simulation

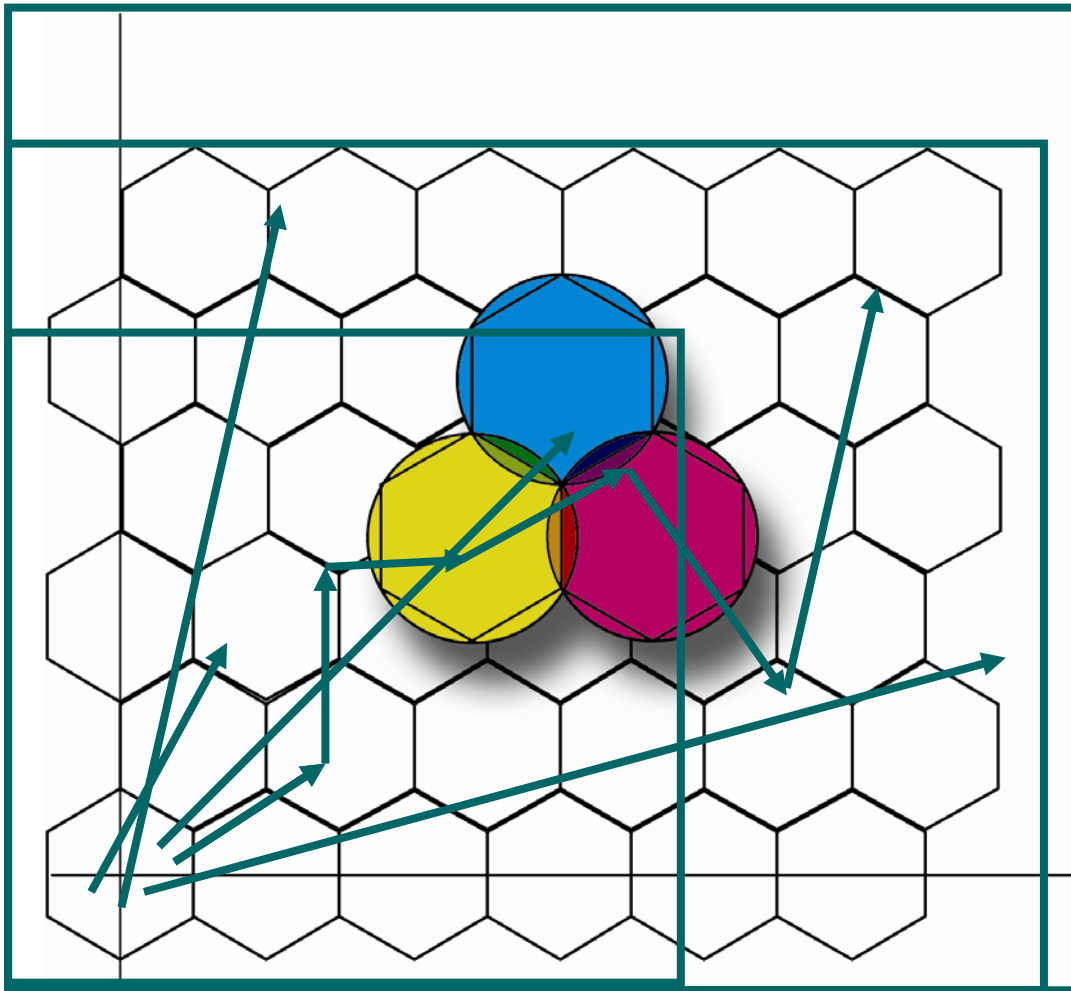

Models:

Random Waypoint

Varying Geometry


Random Direction

Varying Geometry

Varying Speeds



Mean Handover Frequencies: Random Direction Model

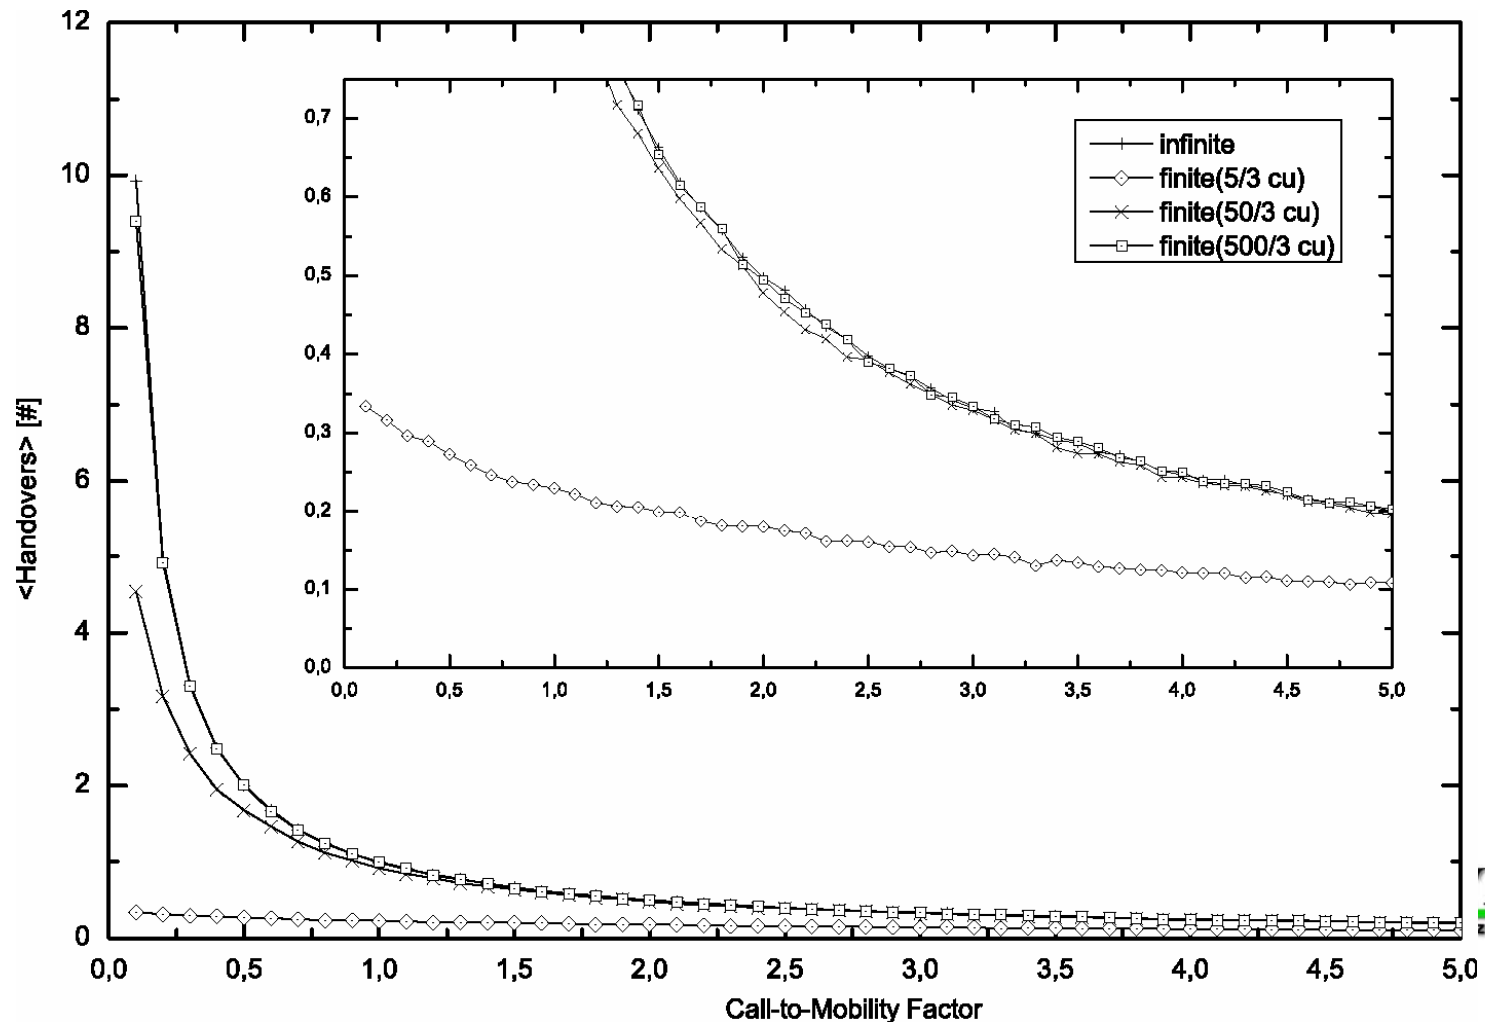

Sources of Erroneous Prediction

